



# Z.C.E

*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

Project Name:

testdxf

Client Name:

te

Capacity:

te



# Z.C.E

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

dk

sdf'kls;

dsmd'l;

svlk'sd;4

vsd

;v;sd4



# Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

## 1. Belt Conveyor

### Sec01: General Data

Field	Value
Manufacturer	Winkel
Quantity	1

### Sec02: Design Data

Field	Value
Width	1600
Length	4000

### Sec03: Gearbox Data

Field	Value
Trade Mark	SEW
Model	SA57T

### Sec04: Motor Data



# Z.C.E







شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

Field	Value
Trade Mark	SEW
Rated Power	0.37 kW
Supply Voltage	380 V, 3 Phases, 50 Hz
Insulation	Class F
Temp Rise	Class B

## Sec05: Material Data

Field	Value
Frame	Hot deep galvanized steel
Roller	Hot deep galvanized steel
Bolts & Nuts	AISI 304 (A2)
Conveyor	Rubber 10 mm (3Ply cotton/nylon)

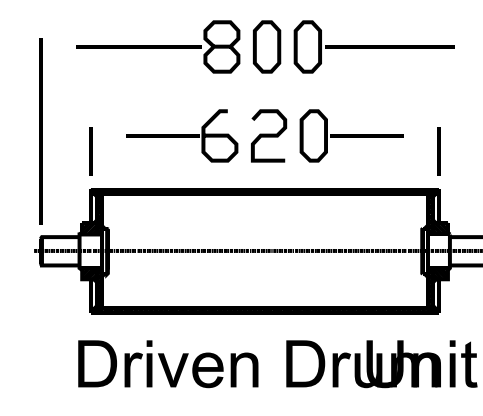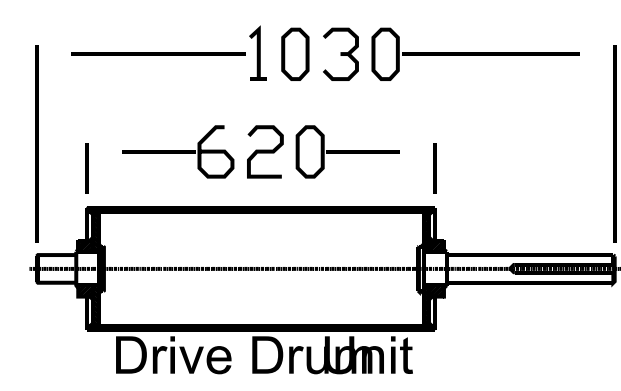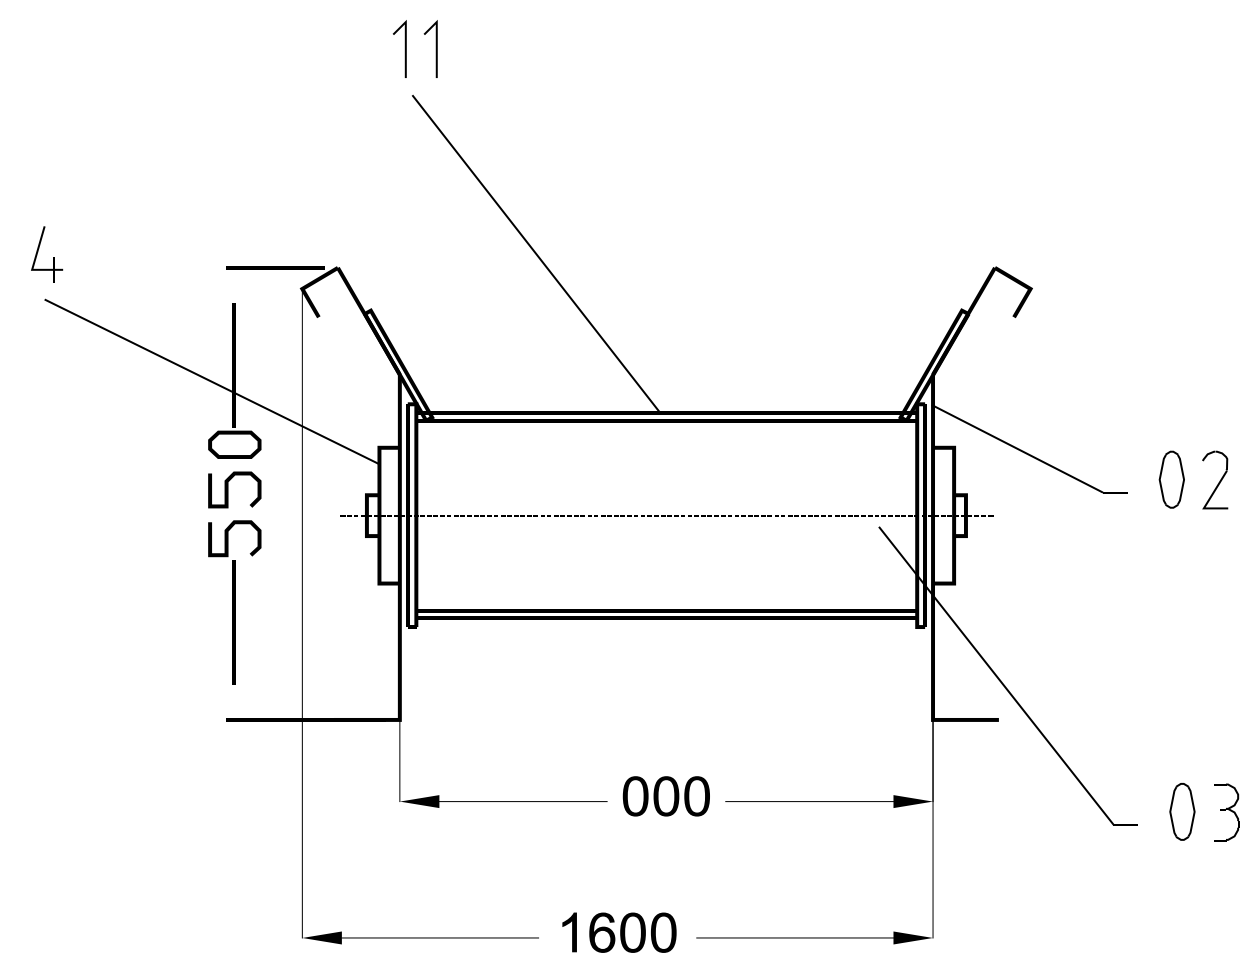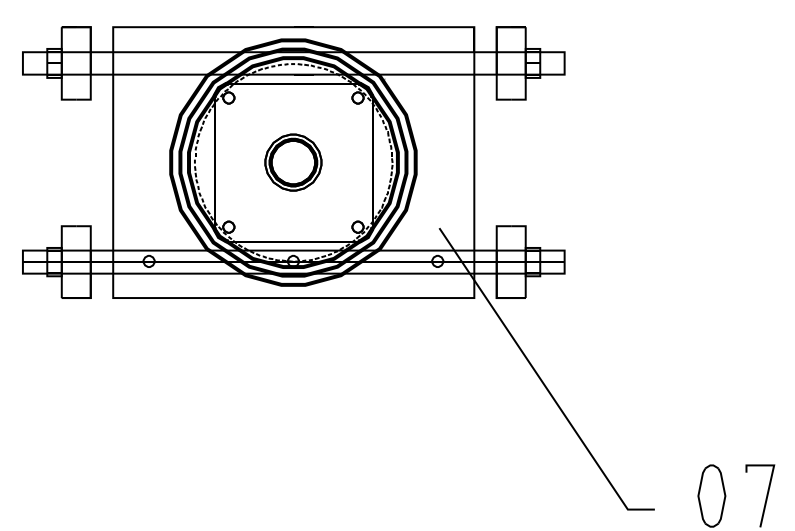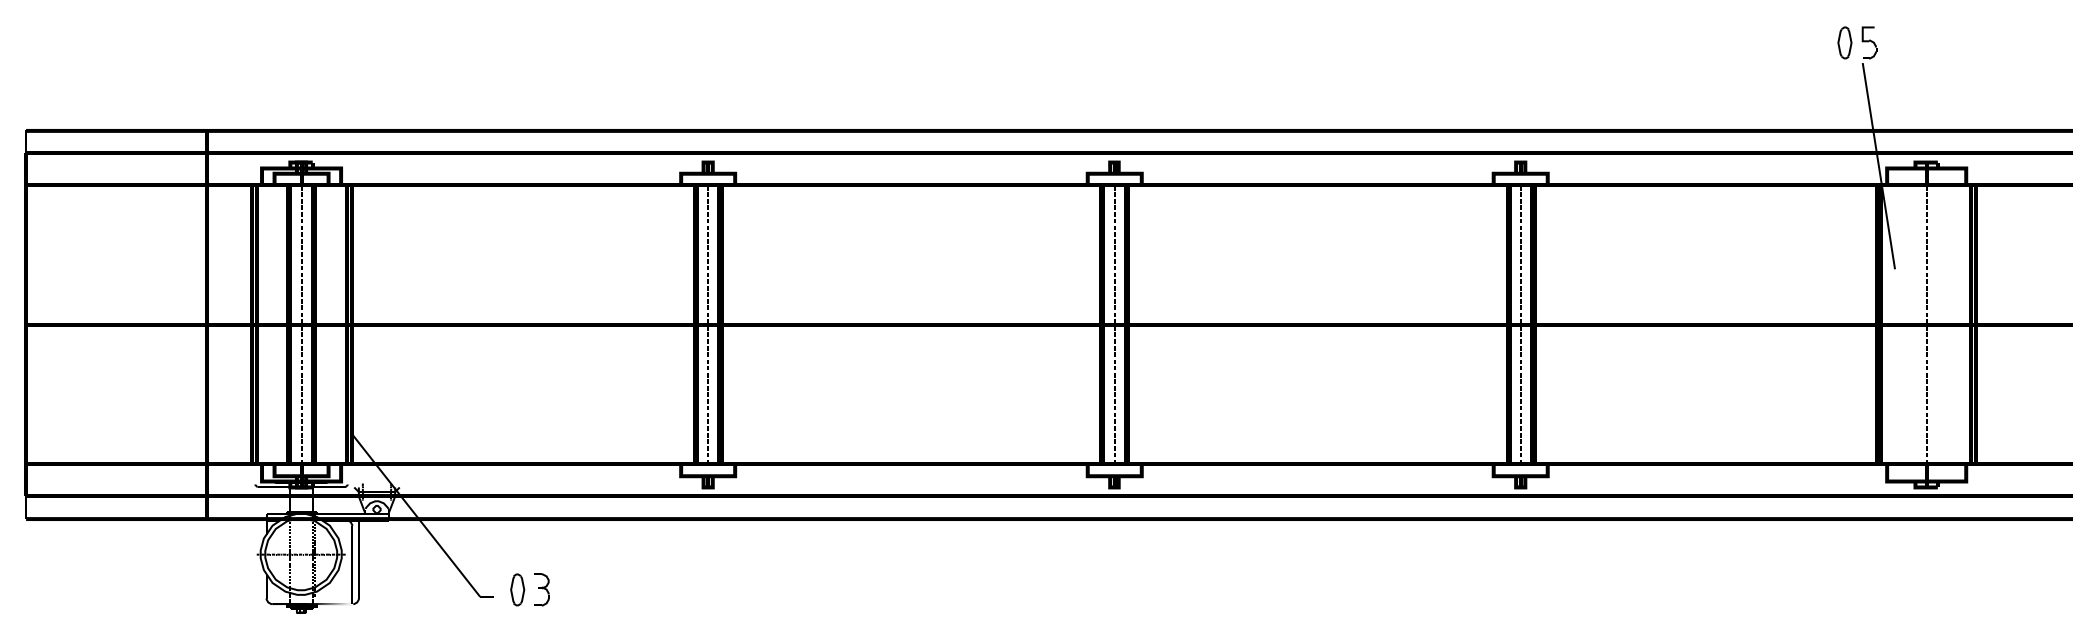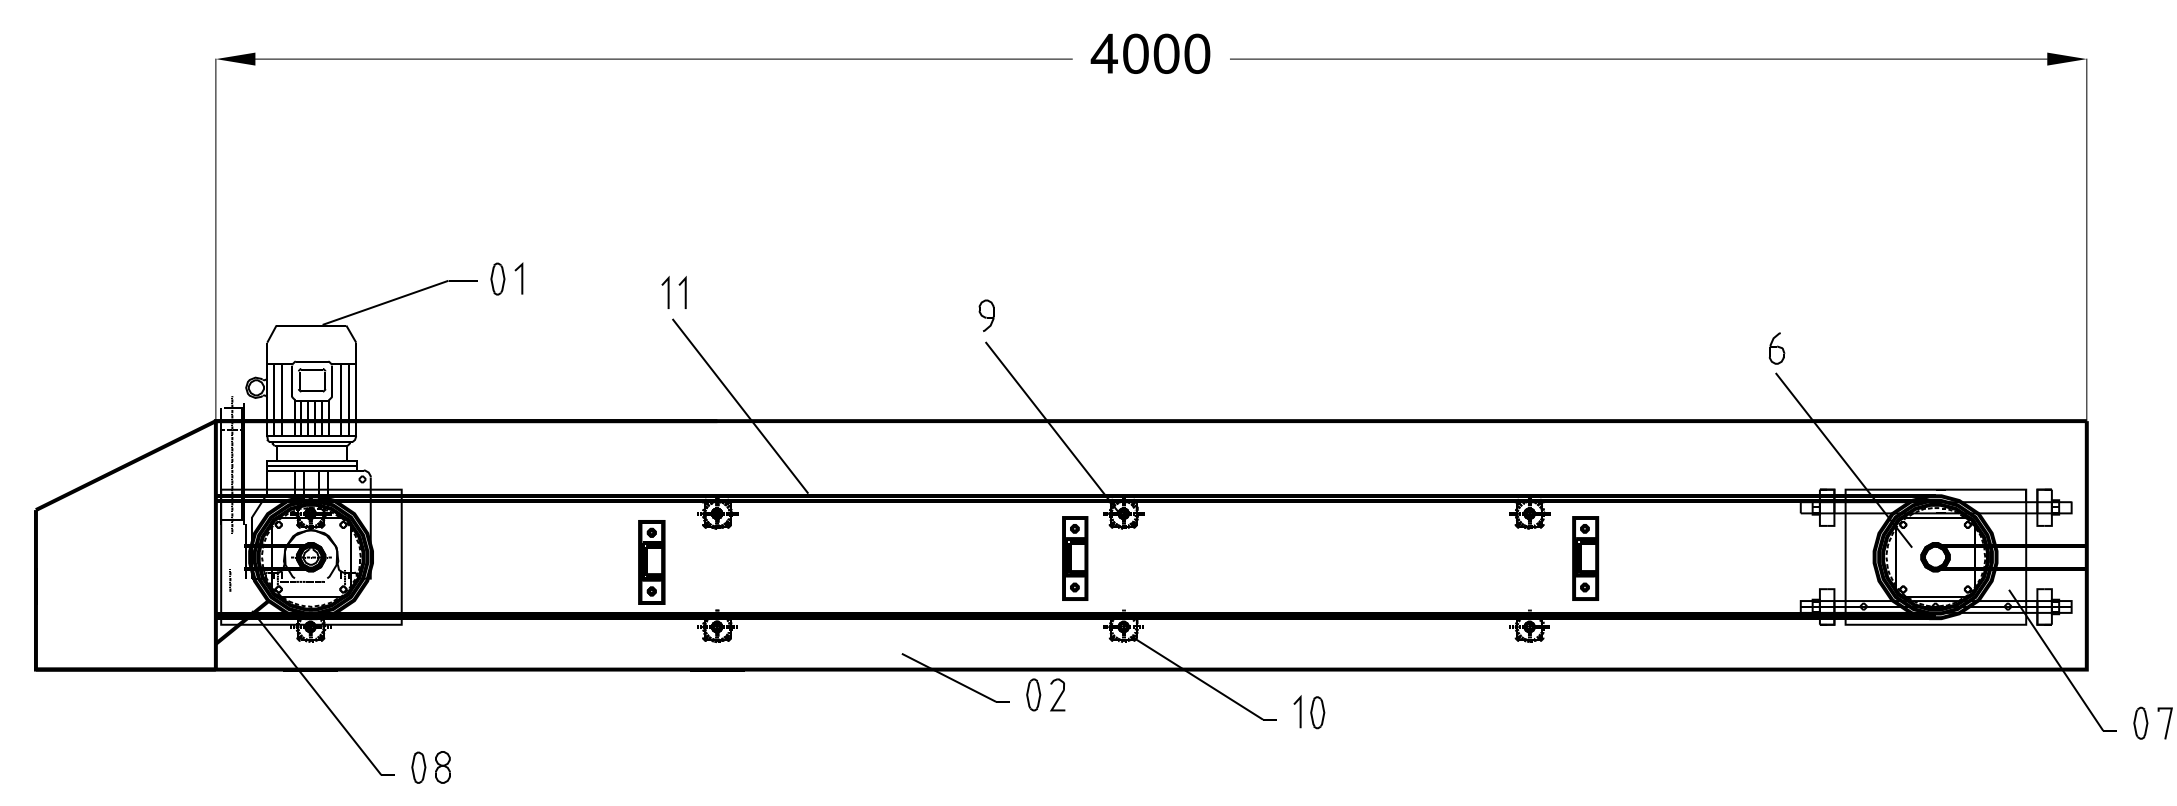

TURN KEY CONTRACTORS:

**Z.C.E** ELZABRAA  
AUTOSATRAD ROAD \_ ARAB ABO SAAD \_ CAIRO \_ EGYPT  
elzabaraa.sag2014@gmail.com

TITALE

Belt conveyor

SCALE	REF. DWG. NO.	SIZE	REV.
DRAWN	PREPARED	CHECKED	APPROVED
K.T	A.S	A.S	S.MICHAEL



# Z.C.E

*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

## 2. Wall Penstocks



# Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

## 3. Gritremoval

### Sec01: General Data

Field	Value
Manufacturer	Factory
Quantity	One bridge serve two channel
Function	Waste water
Installation location	Rectangle tank
Installation country	Egypt
Installation (indoor, outdoor)	outdoor
Continuous operation	yes
No. Of hours a day	24/24 h

### Sec02: Design Data

Field	Value
Total tank width	600 mm
Total tank length	7500 mm
Water depth	600 mm



# Z.C.E

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

Length of the bridge	2000 mm
Width of bridge	1000 mm
Qty of driving wheels / bridge	2
Qty of free wheels / bridge	2
Qty of drive gearbox / bridge	1
Admissible load on bridge / tank	500 kg / m <sup>2</sup>
Max. Allowable deflection / tank	1/500

### Sec03: Walkway, Handrail, Wheel Data

Field	Value
Walkway type	Grating
Handrail Type	tubular
Handrail Height	1000 mm
Wheel Diameter	300 mm
Wheel Width	90 mm
Wheel rail	square bar 40x40mm

### Sec04: Scraper Data

Field	Value
Grease scraper Thickness	6 mm
Height of the scraper	300 mm
Fixation of sludge scraper	by pipe suspenders
Rubber wearing strips cross section	12x100 mm
Scum ramp thickness	6mm

### Sec05: Gearmotor Data

Field	Value
Gearbox Qty	1





# Z.C.E

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

Gearbox Trade mark	SEW
Model	SA57/T
Electric Motor Trade Mark	SEW
Rated Power	0.37 kW
Supply Voltage	380 V, 3 Phases, 50 Hz
Insulation	Class F
Temp Rise	Class B
Ingress Protection	IP65

## Sec06: Scraper Data

Field	Value
Sand Scraper Thickness	6 mm
Height of the scraper	300 mm
Fixation of sludge scraper	by pipe suspenders
Rubber wearing strips cross section	12x100 mm

## Sec07: Drive unit

Field	Value
Drive Unit Gearbox Qty	1
Drive Unit Trade Mark	SEW
Drive Unit Model	SA77/T
Electric Motor Trade Mark	SEW
Electric Motor Rated Power	0.18 kW
Insulation	Class F
Temp Rise	Class B
Ingress Protection	IP65

## Sec08: Control panel Data



# Z.C.E

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات


*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

Field	Value
Local control panel	Electrostatic painting
Panel thicknesses	2 mm
Component	Schneider
Operation	Manual / Automatic timer switch

## Sec09: Material Data

Field	Value
Material of Bridge	Hot deep galvanized steel
Scum ramp	AISI 304
Grease Scraper	AISI 304
Sludge Scraper	AISI 304
Bolts and nuts	AISI 304 (A2)
Open mesh floor	GRP or Hot deep galvanized steel
Wheel	Carbon steel
Wheel Shaft	Carbon steel

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

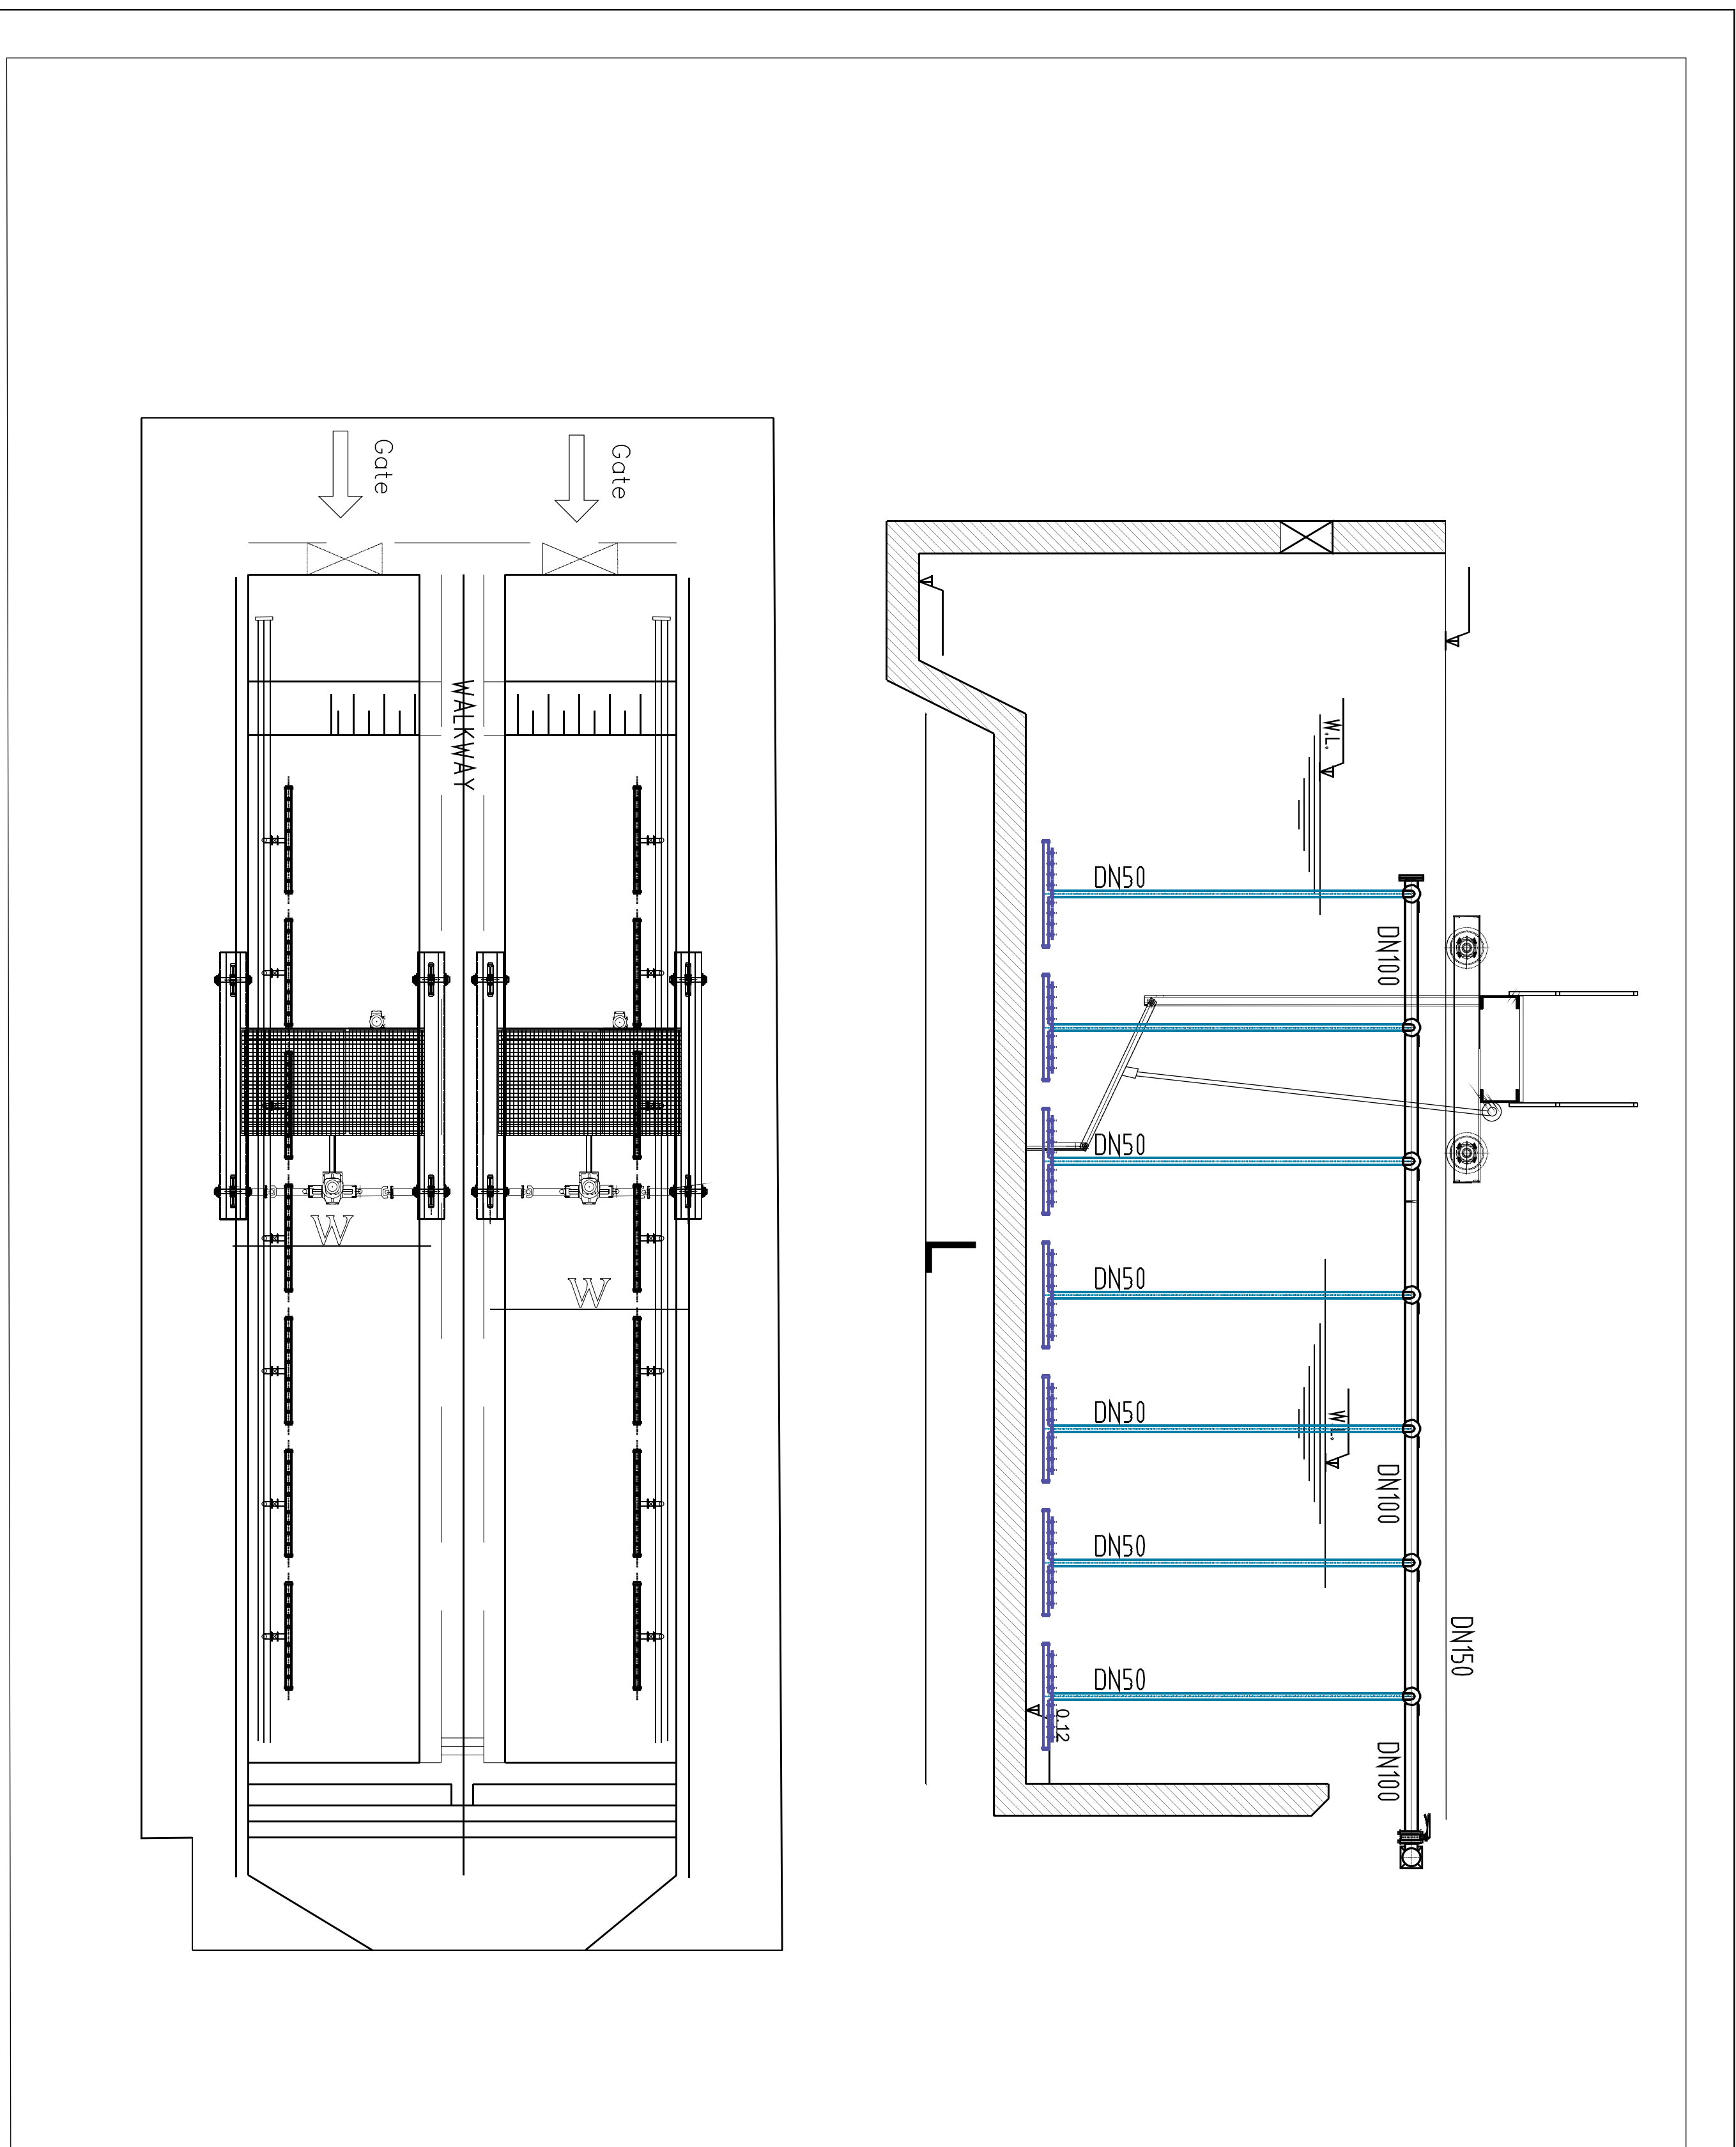

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

TURN KEY CONTRACTORS:				
Z.C.E		MEZARBAK		
AYRANCIYADAN BOYU		AYLA AYRANCIYADAN		
		CUMRU - BODURKAN		
		elbilan.ayranci@yandex.com		
TITALE				
Giri removal				



# Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

## 4. Sand Silo

### Sec01:

Field	Value
Manufacturer	Factory
Quantity	1

### Sec02:



Field	Value
Capacity	5 m3
Inlet	Pipe 150 mm PN10
Outlet	Pipe 150 mm PN10

### Sec03:

Field	Value
Shell	Epoxy coated steel 37
Cone	Epoxy coated steel 37
Nozzle	Epoxy coated steel 37

PRODUCED BY AN AUTODESK STUDENT VERSION

PRODUCED BY AN AUTODESK STUDENT VERSION

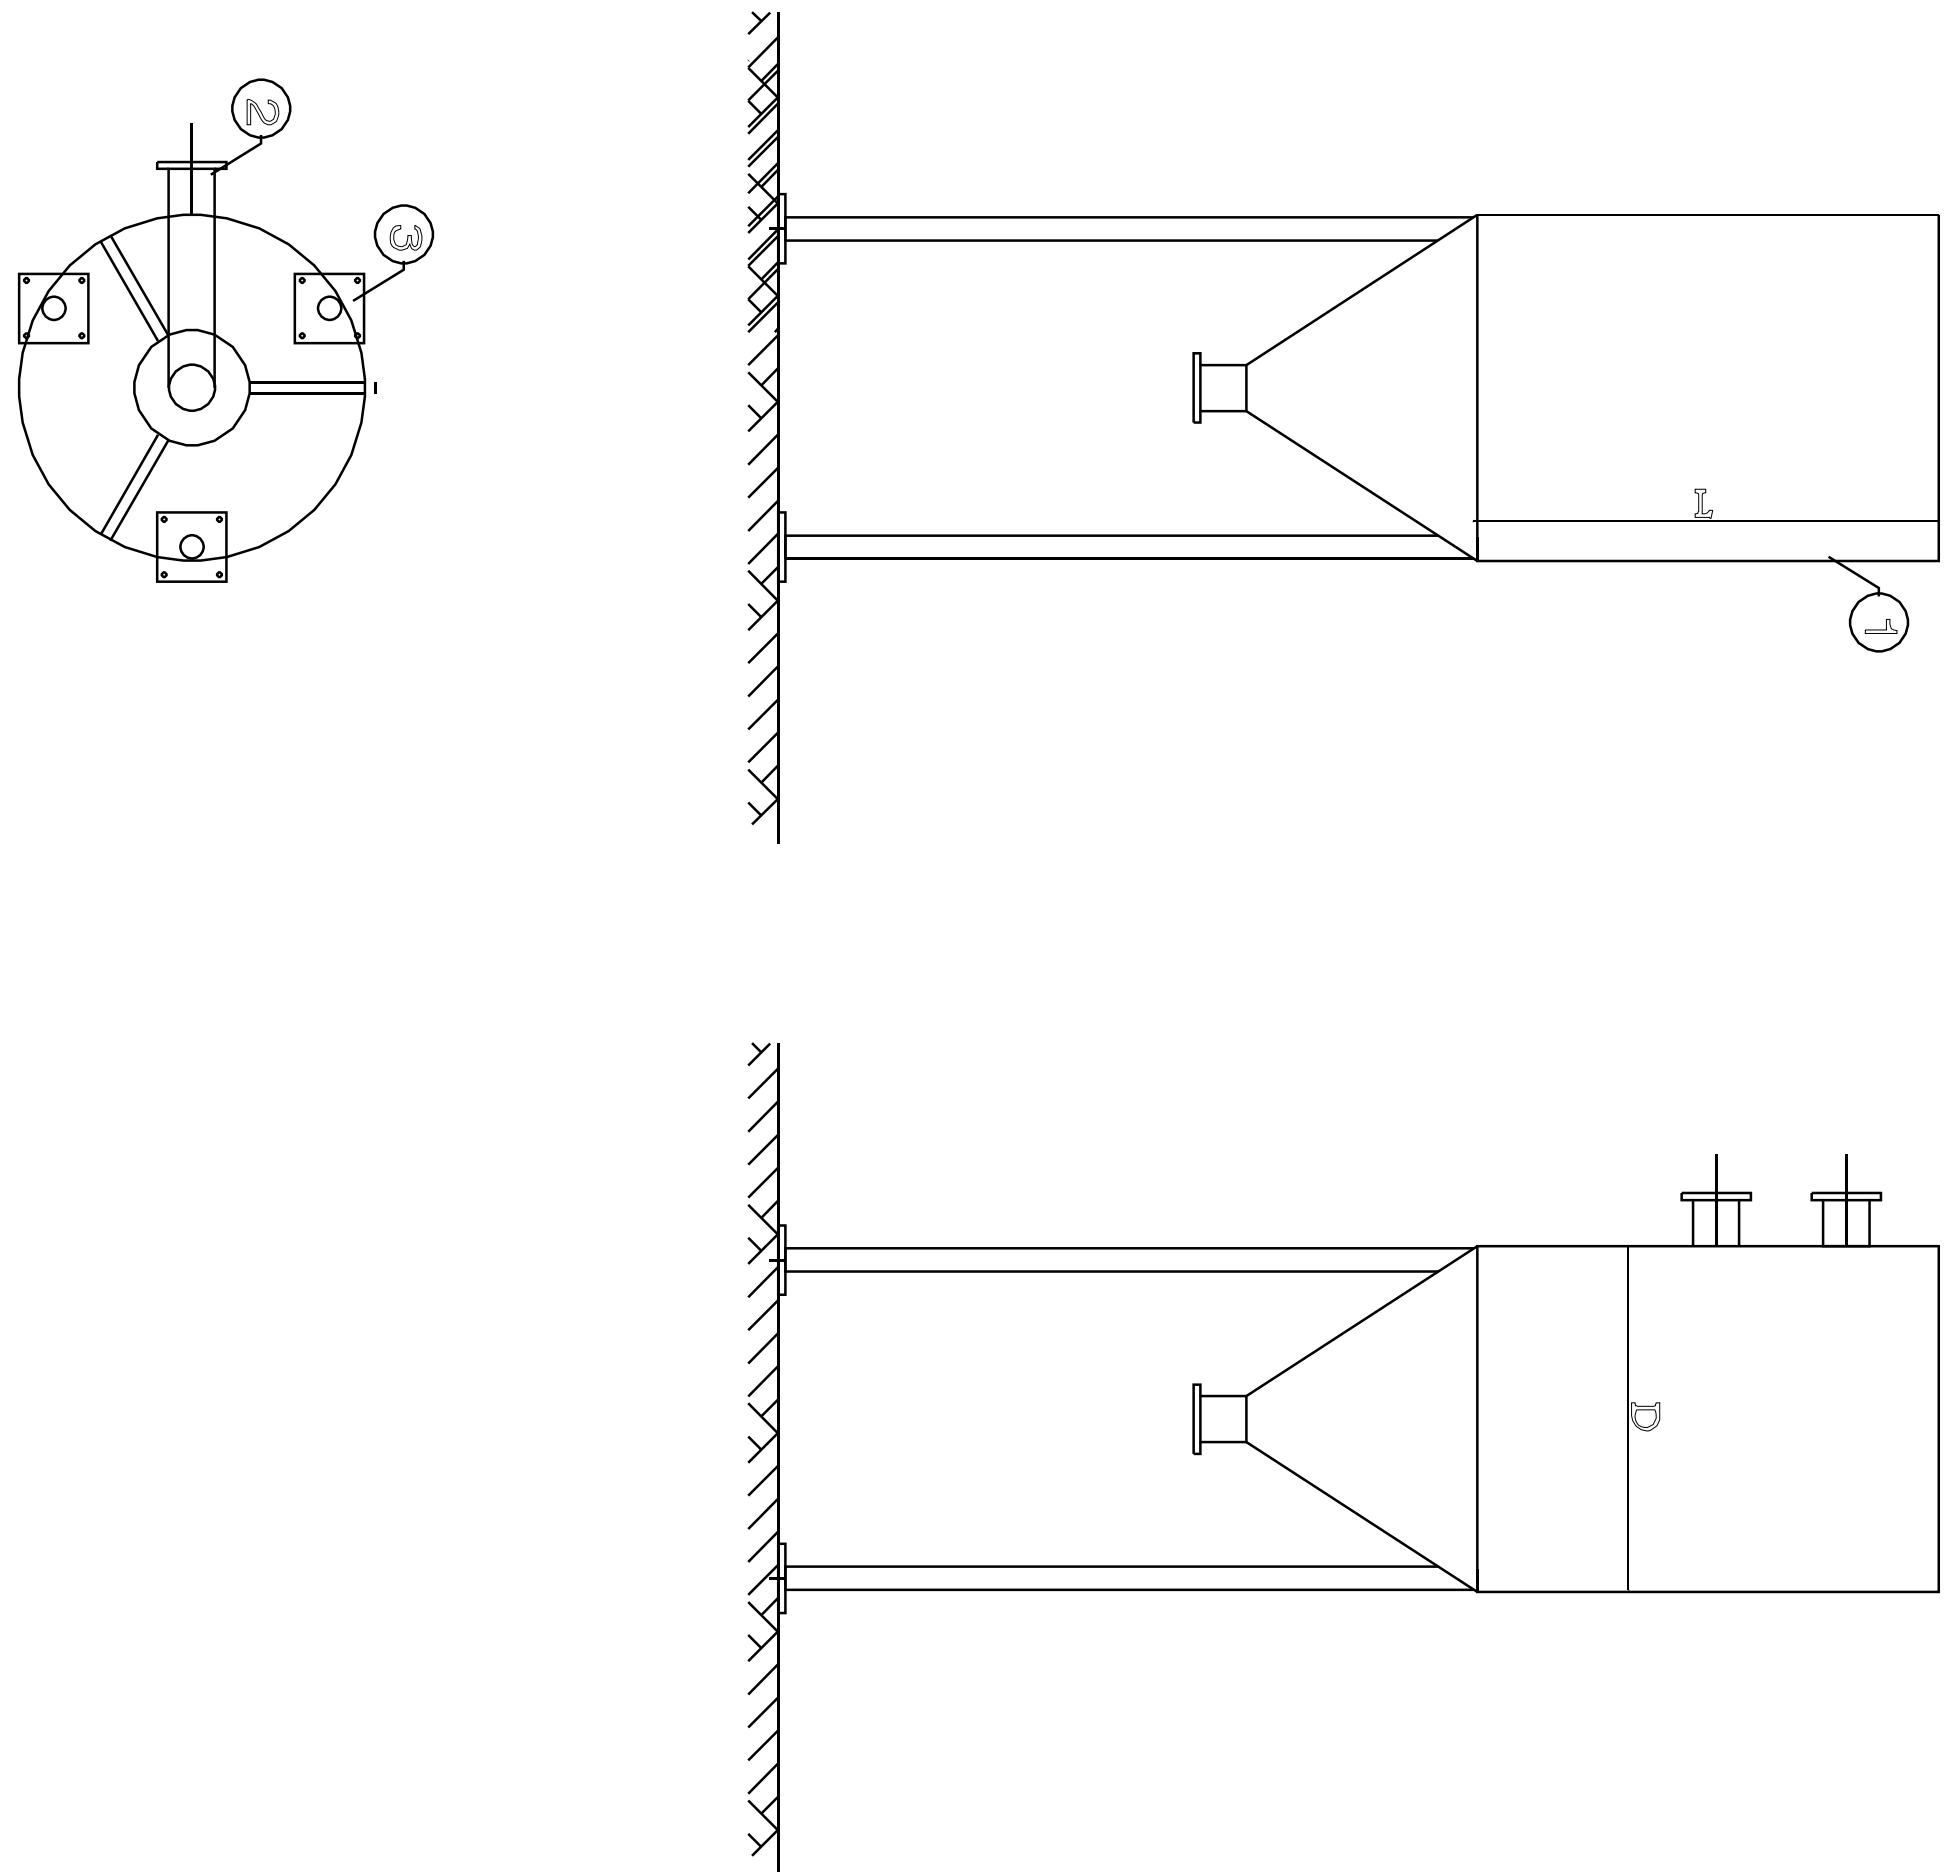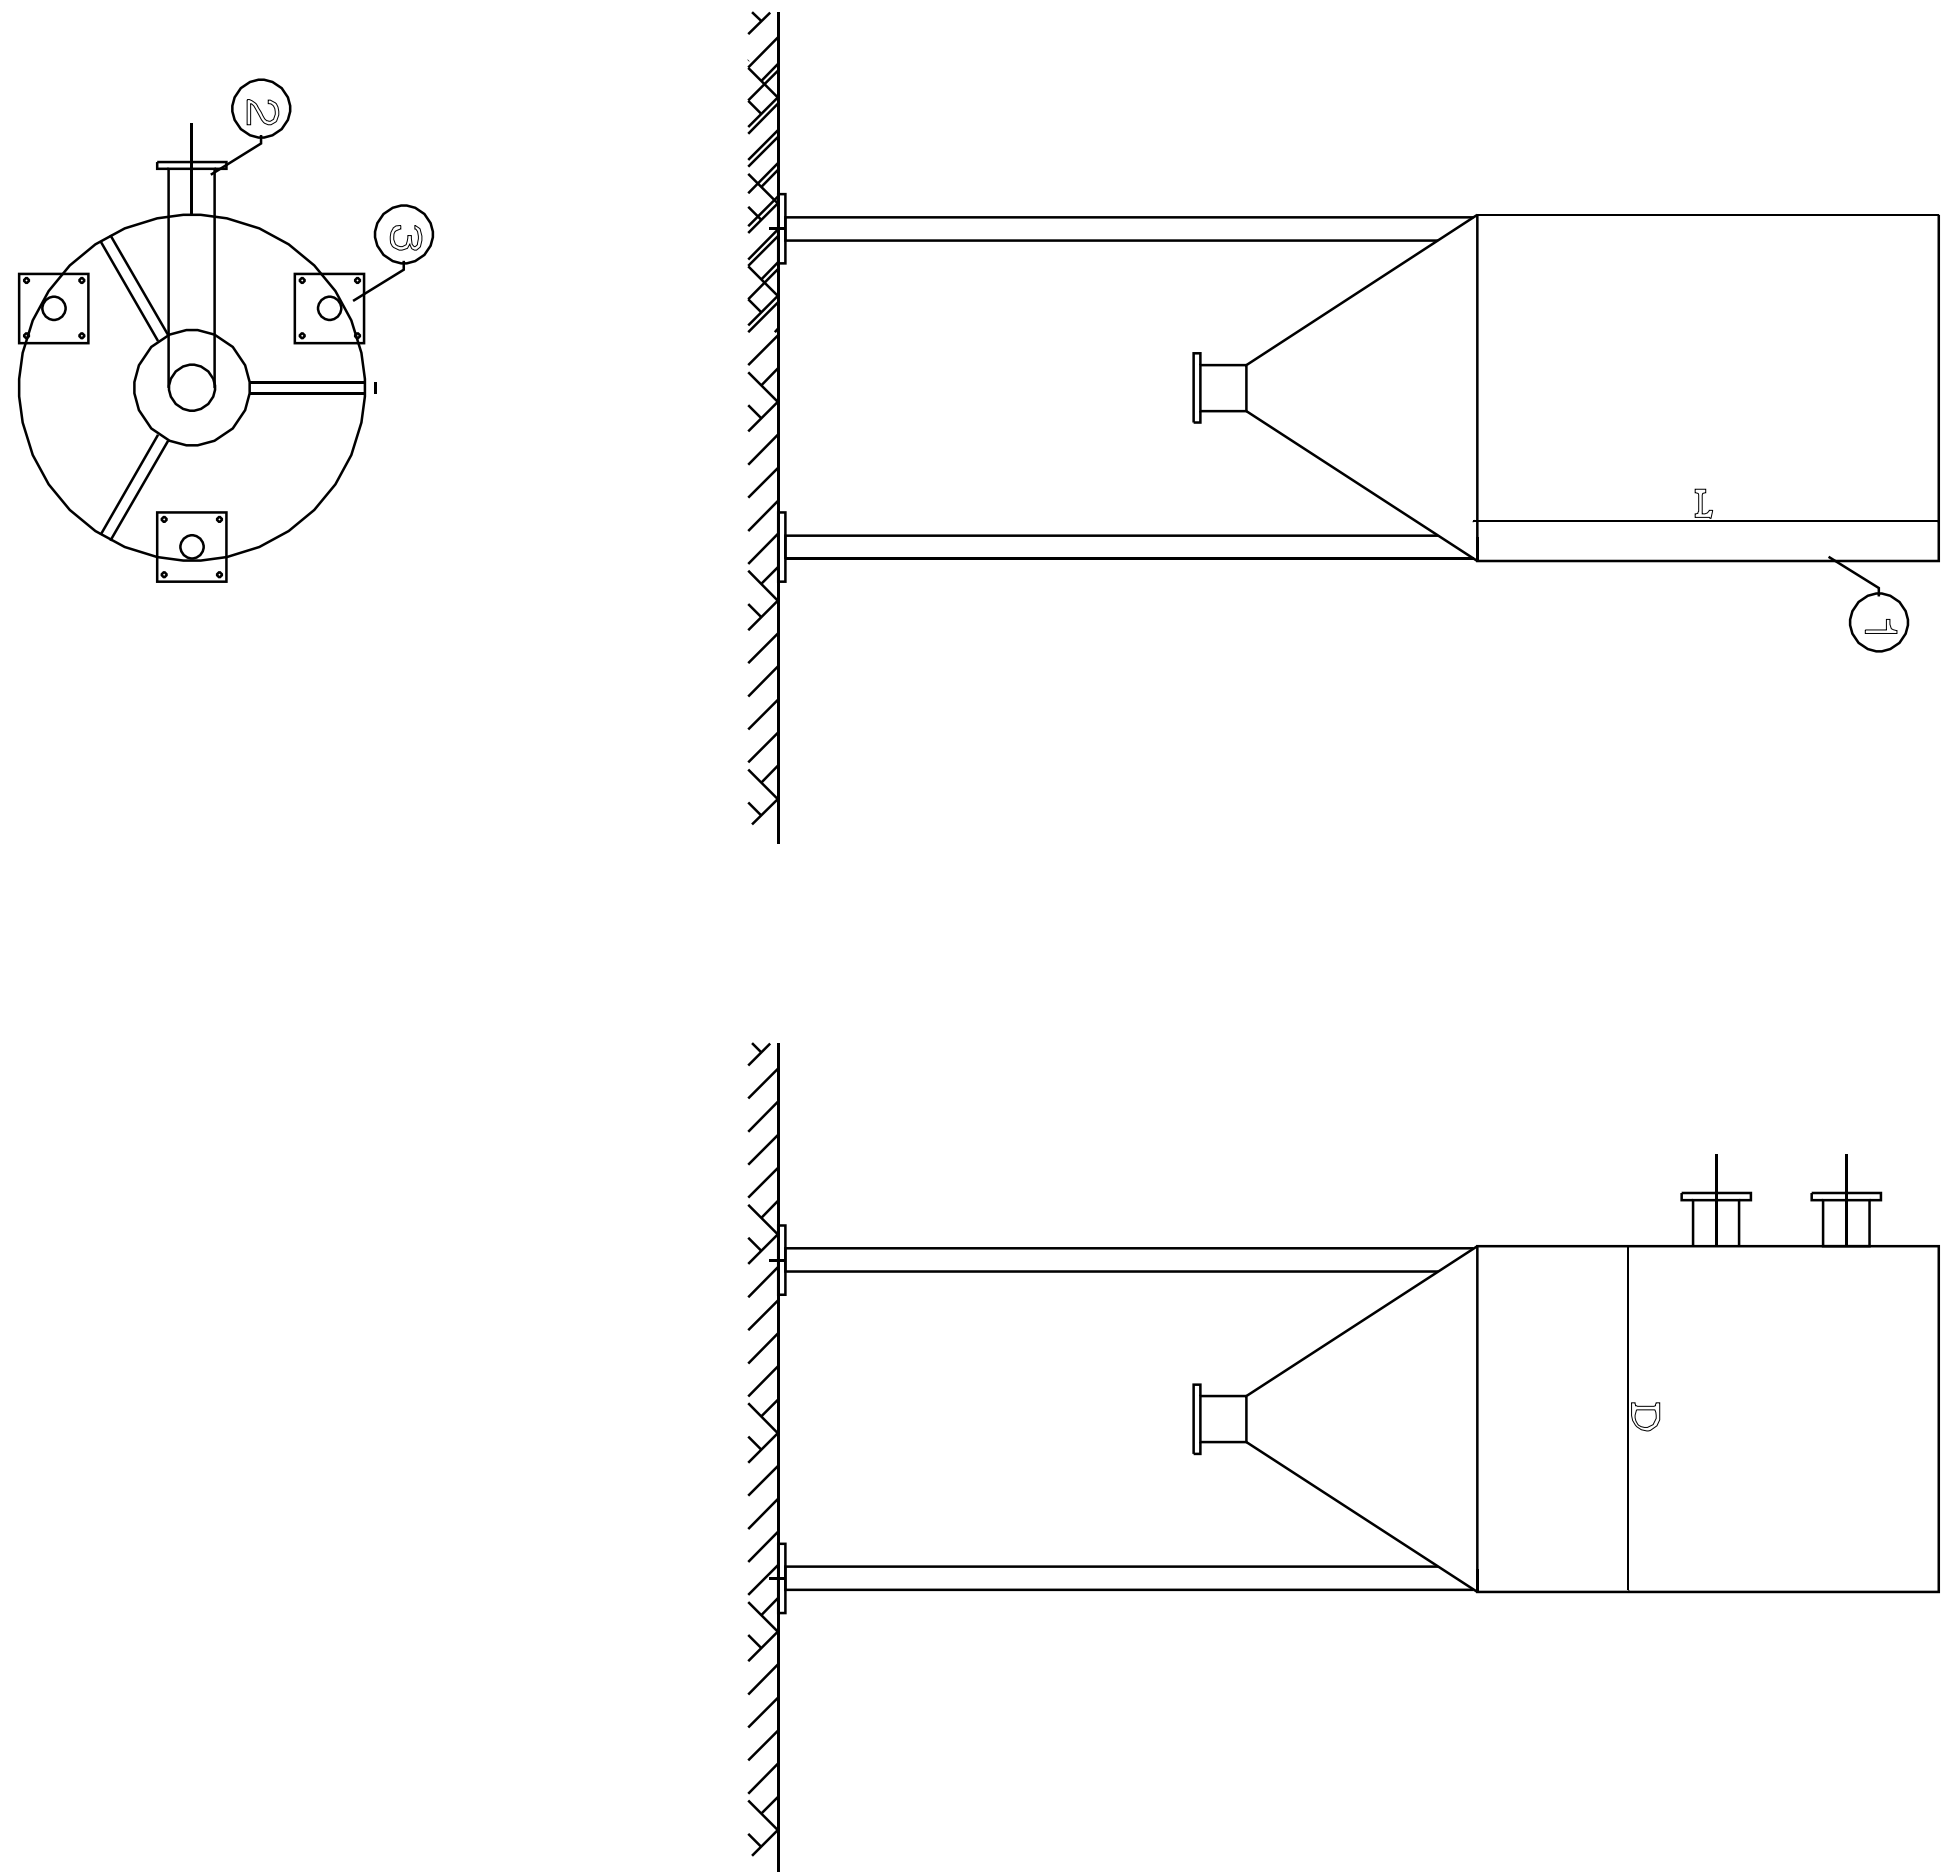

7	Level indicator	ST - 37
6	loader	ST - 37
5	Vent	ST - 37
4	Handrail	ST - 37
3	Leg pipe 3"	ST - 37
2	Inlet pipe 200 mm	ST - 37
1	Cylinder 6 mm	ST - 37
	Decorations	
None		Monobell

7	Level indicator	ST - 37
6	loader	ST - 37
5	Vent	ST - 37
4	Handrail	ST - 37
3	Leg pipe 3"	ST - 37
2	Inlet pipe 200 mm	ST - 37
1	Cylinder 6 mm	ST - 37
	Decorations	
None		Monobell

[illegible][illegible]

PRODUCED BY AN AUTODESK STUDENT VERSION

PRODUCED BY AN AUTODESK STUDENT VERSION



# Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات

## 5. Manual Screen

### Sec01: General Data

Field	Value
Manufacturer	Factory
Quantity	1
Operation	Manual

### Sec02: Design Data

Field	Value
Flow	0.11 m <sup>3</sup> /s
Width	970 mm
Length	9000 mm
Hand rake	No. 2
Space between bar	50 mm
Bar Type	Rectangular
Bar section	10x30 mm
Inclination	45 Deg



# Z.C.E

شركة الزهراء  
للمقاولات الهندسية  
والتوريدات


*EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying*

## Sec03: Material Data


Field	Value
Frame	AISI 316
Rake	AISI 316
Bar screen	AISI 316

## Sec04: Channel Data


Field	Value
Channel Width	600 mm
Depth	1180 mm

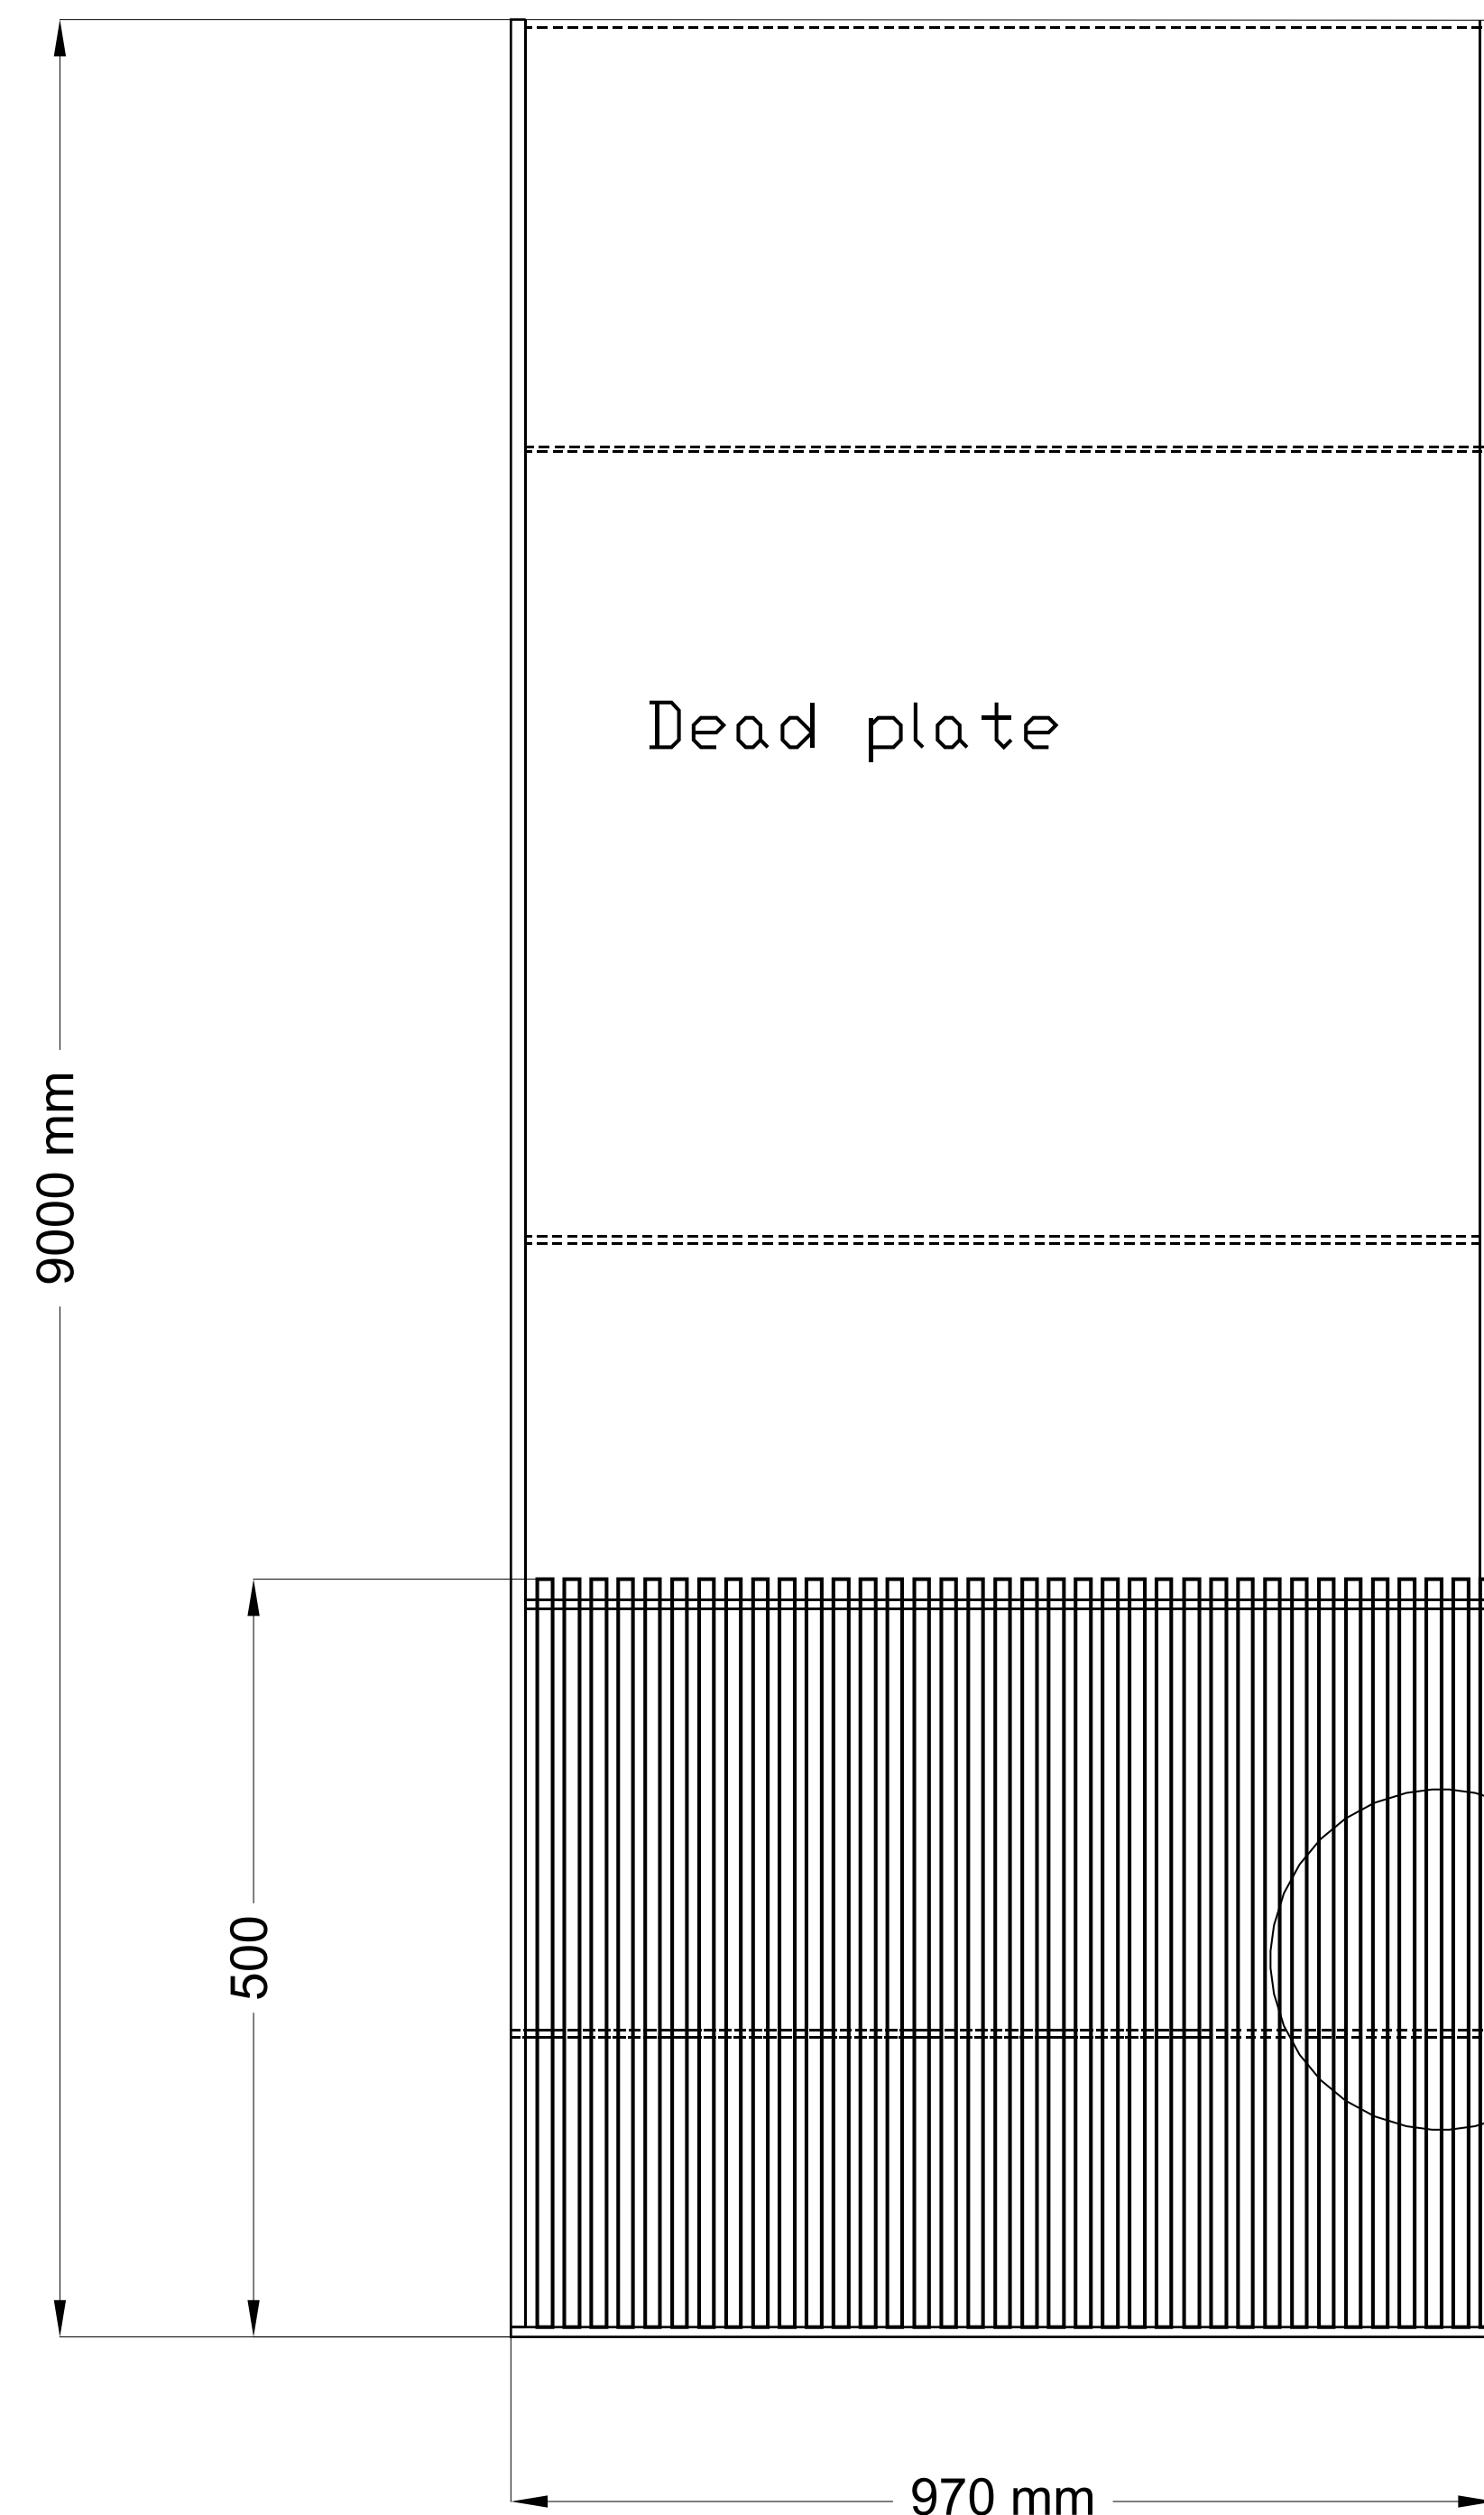

View - A

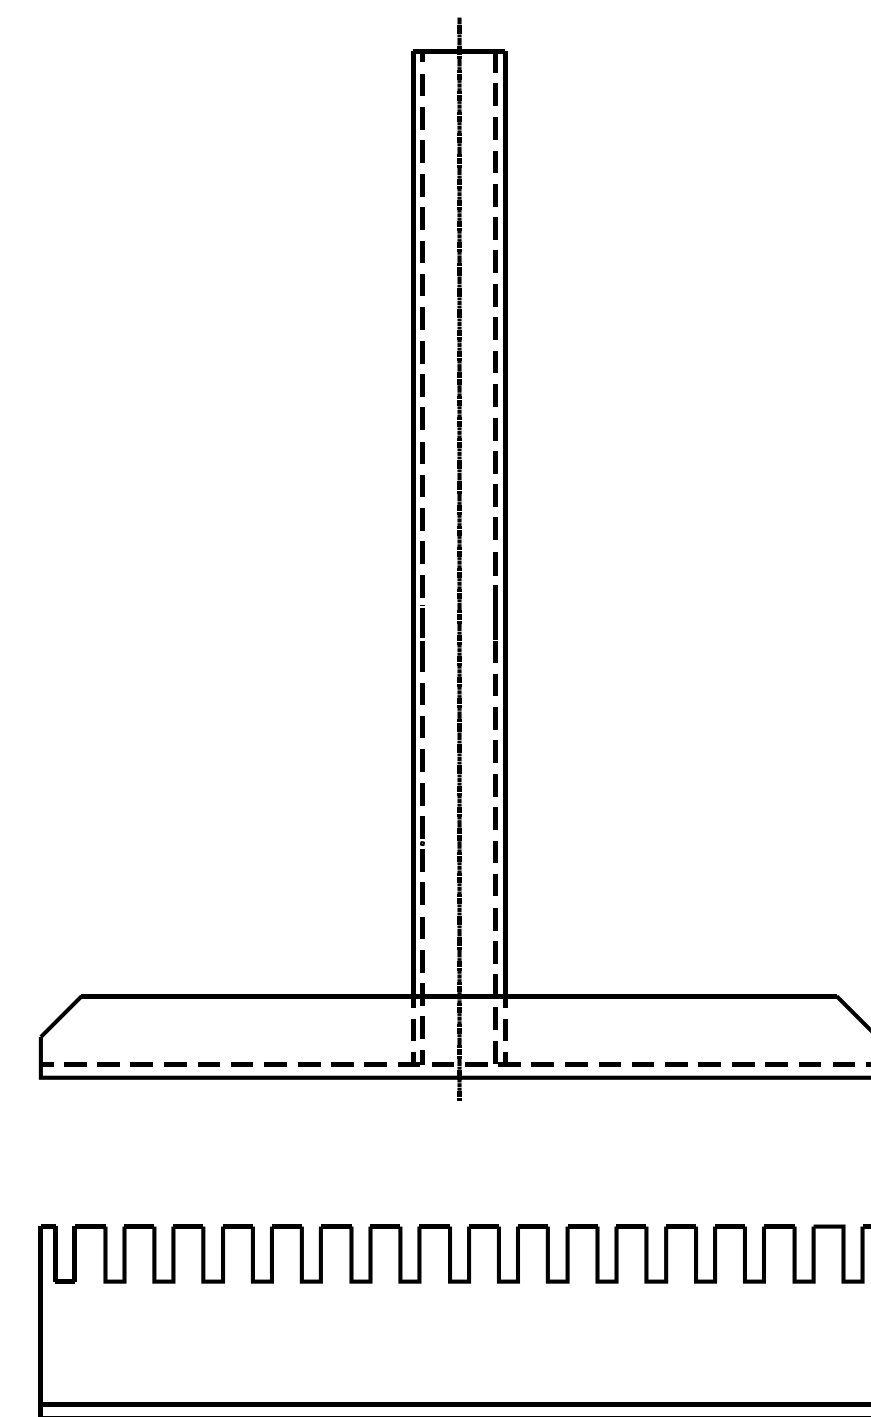

Rack

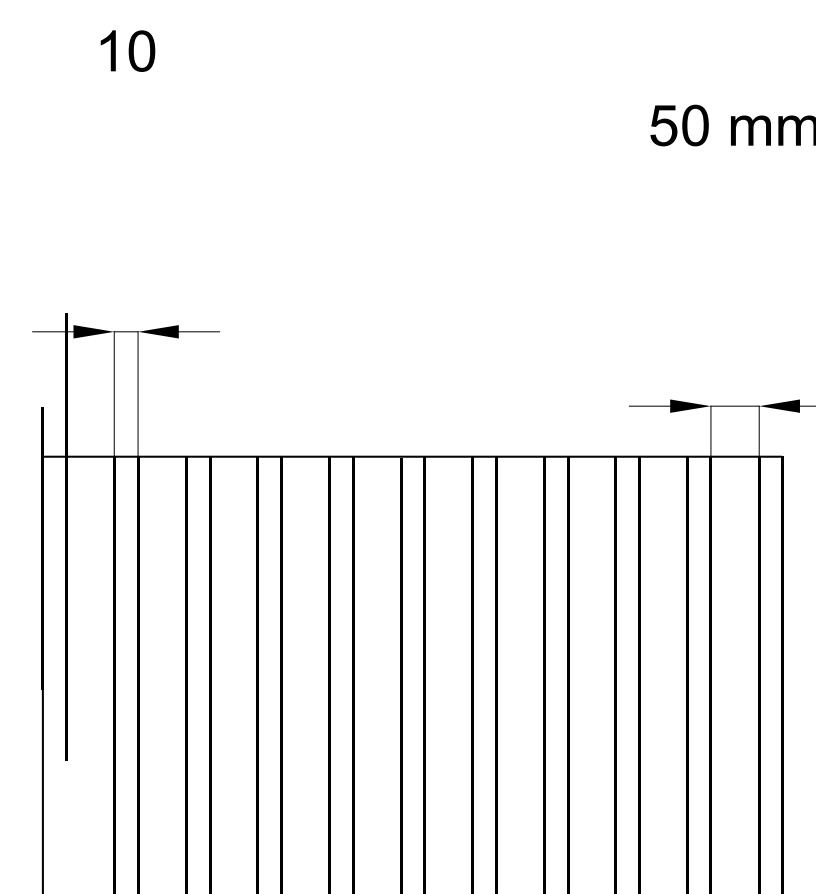

View - A

TURN KEY CONTRACTORS:				
Z.C.E				
AUTOSATRAD ROAD _ ARAB ABO SAAD _ CAIRO _ EGYPT				
elzabaraa.sag2014@gmail.com				
TITALE				
Manual screen				
SCALE	REF. DWG. NO.			SIZE
DRAWN	PREPARED	CHECKED	APPROVED	DATE
K.T	A.S	A.S	S.MICHAEL	