



Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء
للمقاولات الهندسية
والتوريدات

Project Name:

testdxf

Client Name:

te

Capacity:

te



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

dk

sdf'kls;

dsmd'l;

svlk'sd;4

vsd

;v;sd4



Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء
للمقاولات الهندسية
والتوريدات

1. Belt Conveyor



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

Sec01: General Data

Field	Value
Manufacturer	Winkel
Quantity	1

Sec02: Design Data

Field	Value
Width	800
Length	2000

Sec03: Gearbox Data

Field	Value
Trade Mark	SEW
Model	SA57T

Sec04: Motor Data

Field	Value
Trade Mark	SEW
Rated Power	0.37 kW
Supply Voltage	380 V, 3 Phases, 50 Hz
Insulation	Class F
Temp Rise	Class B
Ingress Protection	IP65

Sec05: Material Data

Field	Value
Frame	Hot deep galvanized steel



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

Roller







Hot deep galvanized steel

Bolts & Nuts

AISI 304 (A2)

Conveyor

Rubber 10 mm (3Ply cotton/nylon)

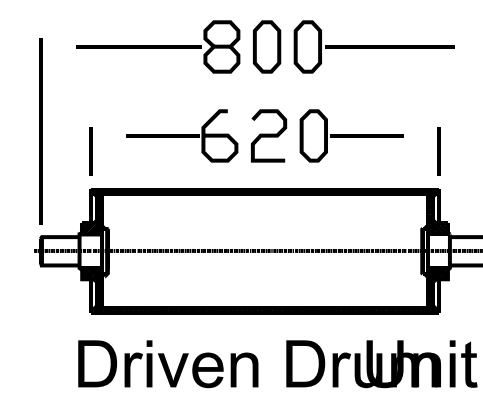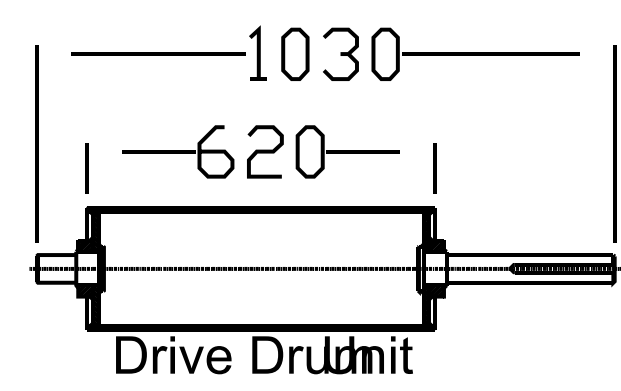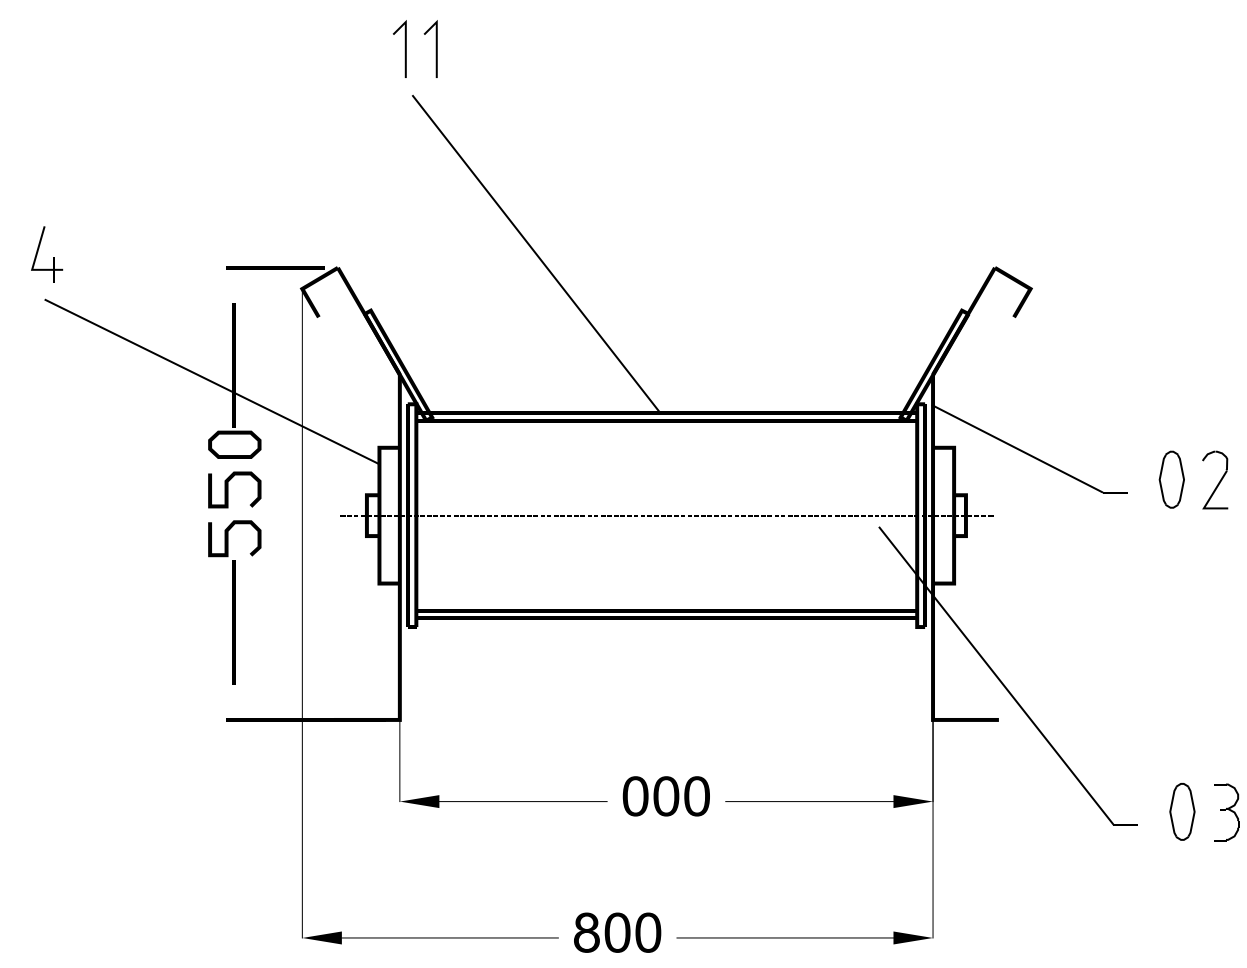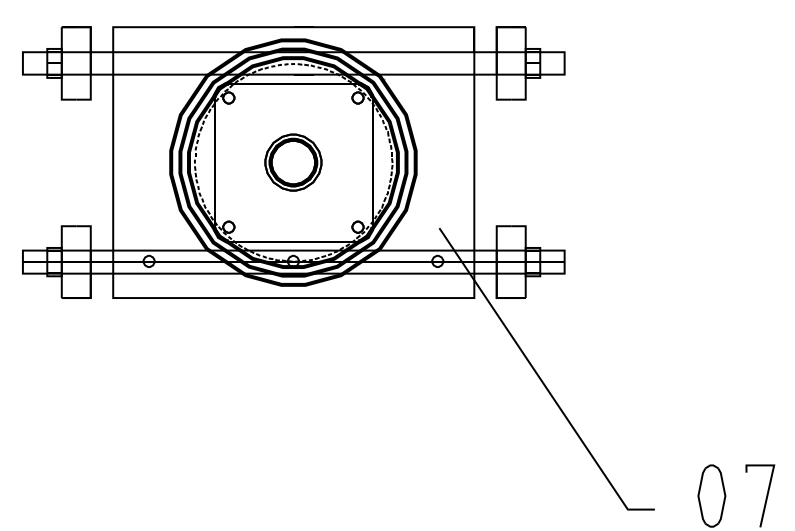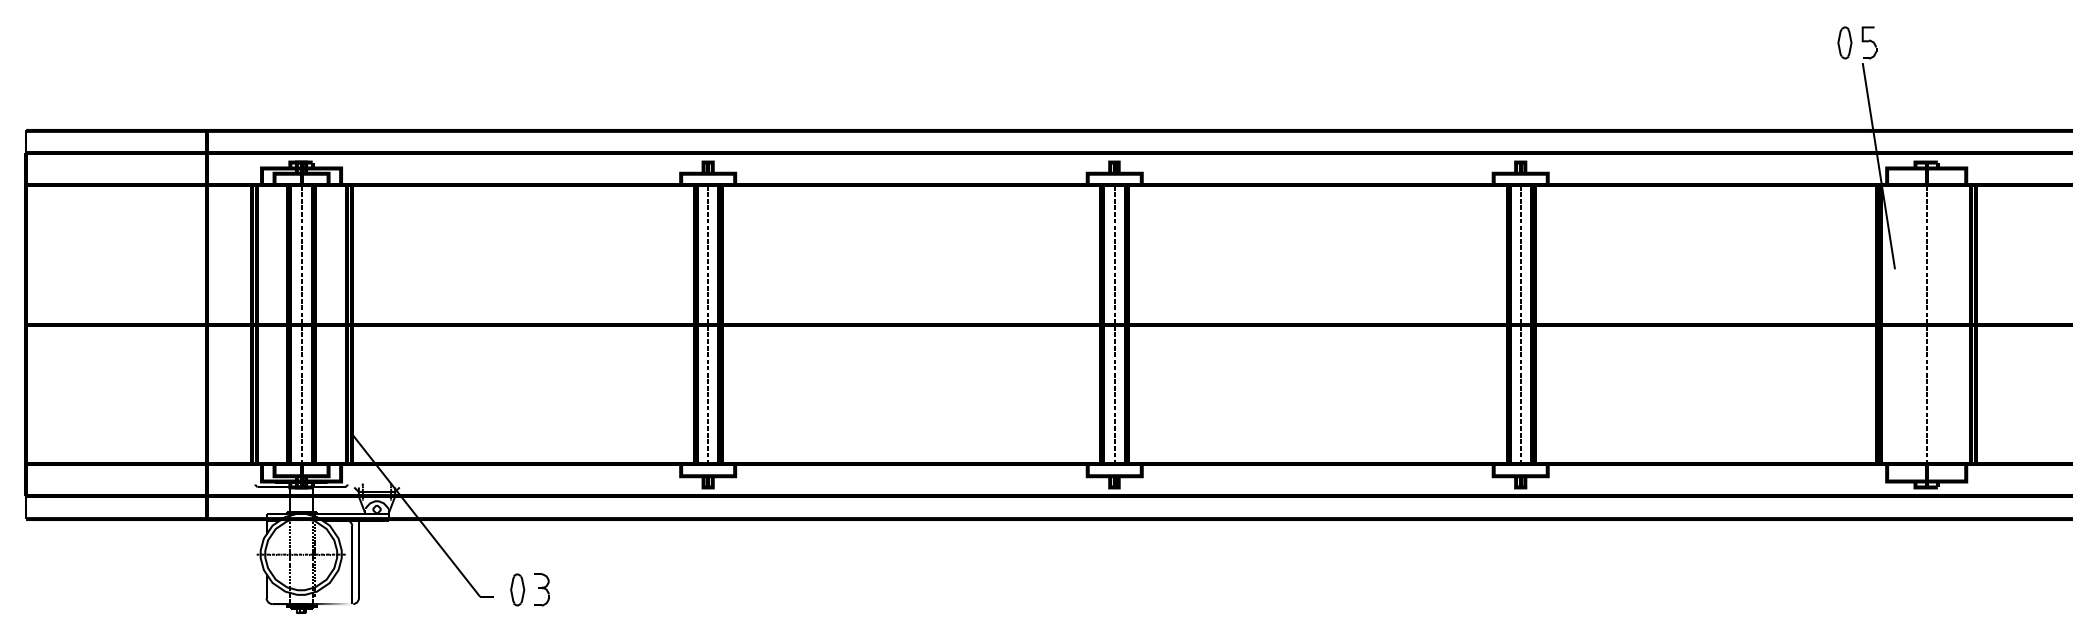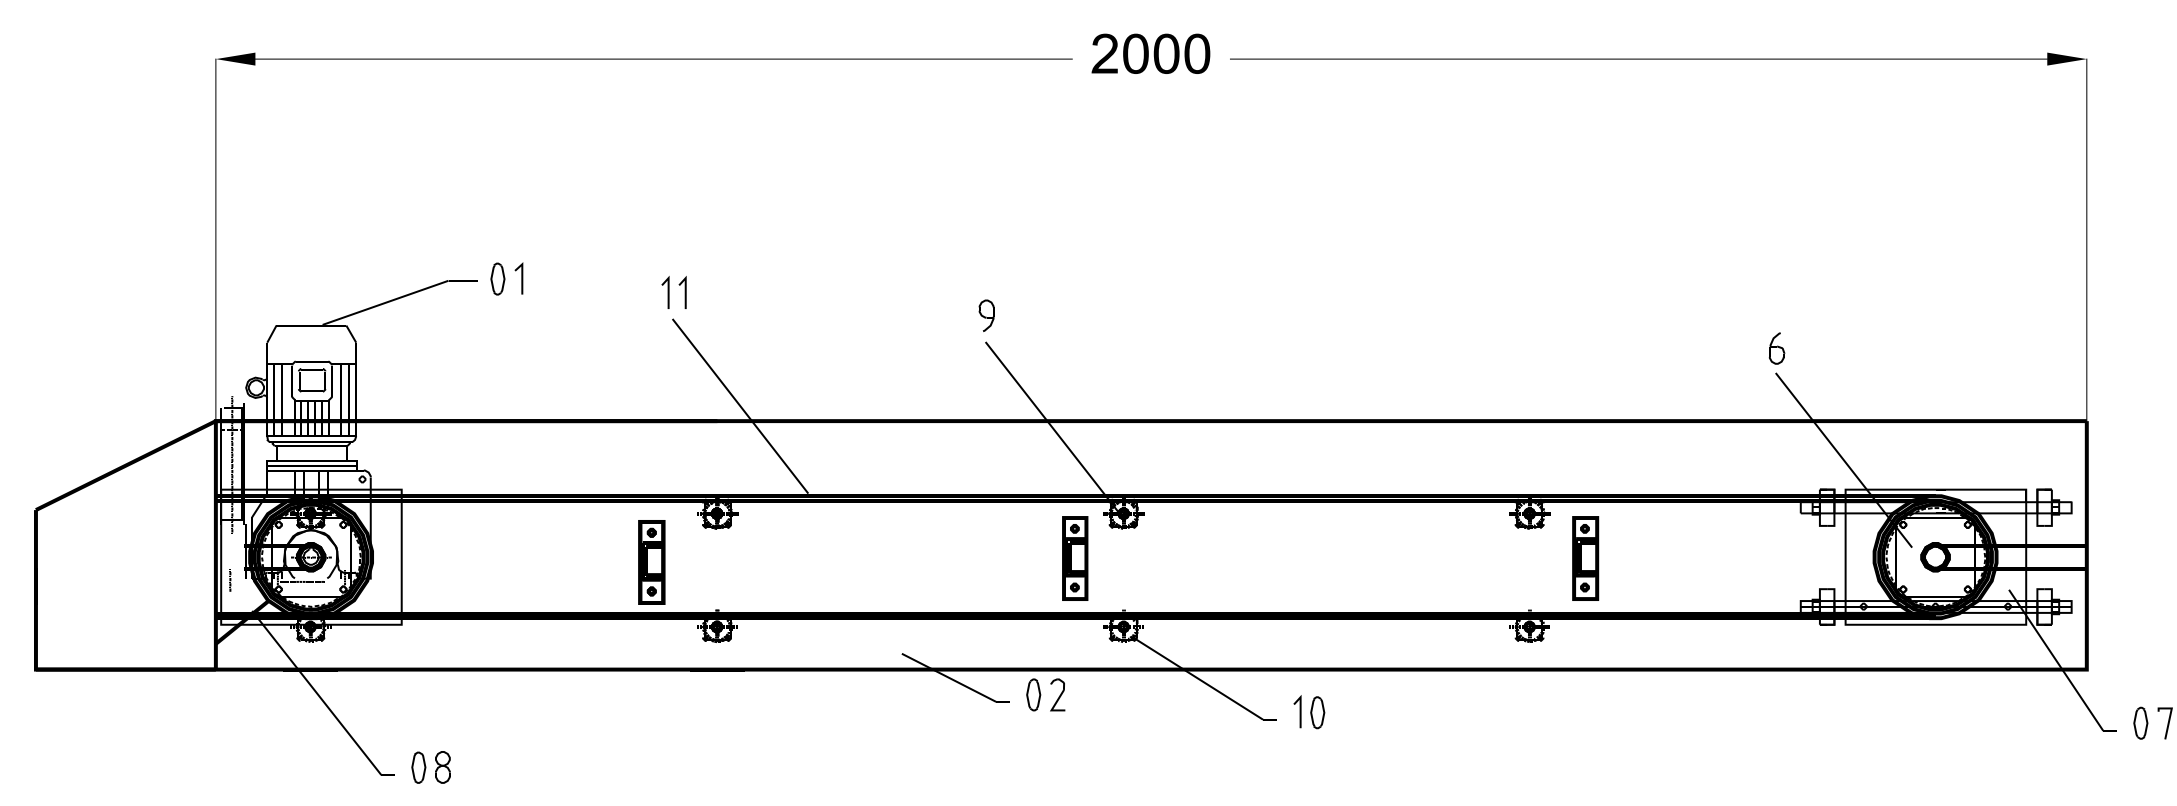

TURN KEY CONTRACTORS:				
Z.C.E ELZABRAA AUTOSATRAD ROAD _ ARAB ABO SAAD _ CAIRO _ EGYPT elzabaraa.sag2014@gmail.com				
TITALE				
Belt conveyor				
SCALE	REF. DWG. NO.		SIZE	REV.
DRAWN	PREPARED	CHECKED	APPROVED	DATE
K.T	A.S	A.S	S.MICHAEL	



Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء
للمقاولات الهندسية
والتوريدات

2. Wall Penstocks



Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء
للمقاولات الهندسية
والتوريدات



Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء
للمقاولات الهندسية
والتوريدات

3. Gritremoval



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

Sec01: General Data

Field	Value
Manufacturer	Factory
Quantity	One bridge serve two channel
Function	Waste water
Installation location	Rectangle tank
Installation country	Egypt
Installation (indoor, outdoor)	outdoor
Continuous operation	yes
No. Of hours a day	24/24 h

Sec02: Design Data

Field	Value
Total tank width	600 mm
Total tank length	7500 mm
Water depth	600 mm
Length of the bridge	2000 mm
Width of bridge	1000 mm
Qty of driving wheels / bridge	2
Qty of free wheels / bridge	2
Qty of drive gearbox / bridge	1
Admissible load on bridge / tank	500 kg / m ²
Max. Allowable deflection / tank	1/500

Sec03: Walkway, Handrail, Wheel Data

Field	Value
Walkway type	Grating



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

Handrail Type	tubular
Handrail Height	1000 mm
Wheel Diameter	300 mm
Wheel Width	90 mm
Wheel rail	square bar 40x40mm

Sec04: Scrapper Data

Field	Value
Grease scrapper Thickness	6 mm
Height of the scrapper	300 mm
Fixation of sludge scrapper	by pipe suspenders
Rubber wearing strips cross section	12x100 mm
Scum ramp thickness	6mm

Sec05: Gearmotor Data

Field	Value
Gearbox Qty	1
Gearbox Trade mark	SEW
Model	SA57/T
Electric Motor Trade Mark	SEW
Rated Power	0.37 kW
Supply Voltage	380 V, 3 Phases, 50 Hz
Insulation	Class F
Temp Rise	Class B
Ingress Protection	IP65

Sec06: Scrapper Data

Field	Value
-------	-------



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

Sand Scraper Thickness	6 mm
Height of the scraper	300 mm
Fixation of sludge scraper	by pipe suspenders
Rubber wearing strips cross section	12x100 mm

Sec07: Drive unit

Field	Value
Drive Unit Gearbox Qty	1
Drive Unit Trade Mark	SEW
Drive Unit Model	SA77/T
Electric Motor Trade Mark	SEW
Electric Motor Rated Power	0.18 kW
Insulation	Class F
Temp Rise	Class B
Ingress Protection	IP65

Sec08: Control panel Data

Field	Value
Local control panel	Electrostatic painting
Panel thicknesses	2 mm
Component	Schneider
Operation	Manual / Automatic timer switch

Sec09: Material Data

Field	Value
Material of Bridge	Hot deep galvanized steel
Scum ramp	AISI 304
Grease Scraper	AISI 304



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

Sludge Scraper

AISI 304

Bolts and nuts

AISI 304 (A2)

Open mesh floor

GRP or Hot deep galvanized steel



Wheel

Carbon steel

Wheel Shaft

Carbon steel

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

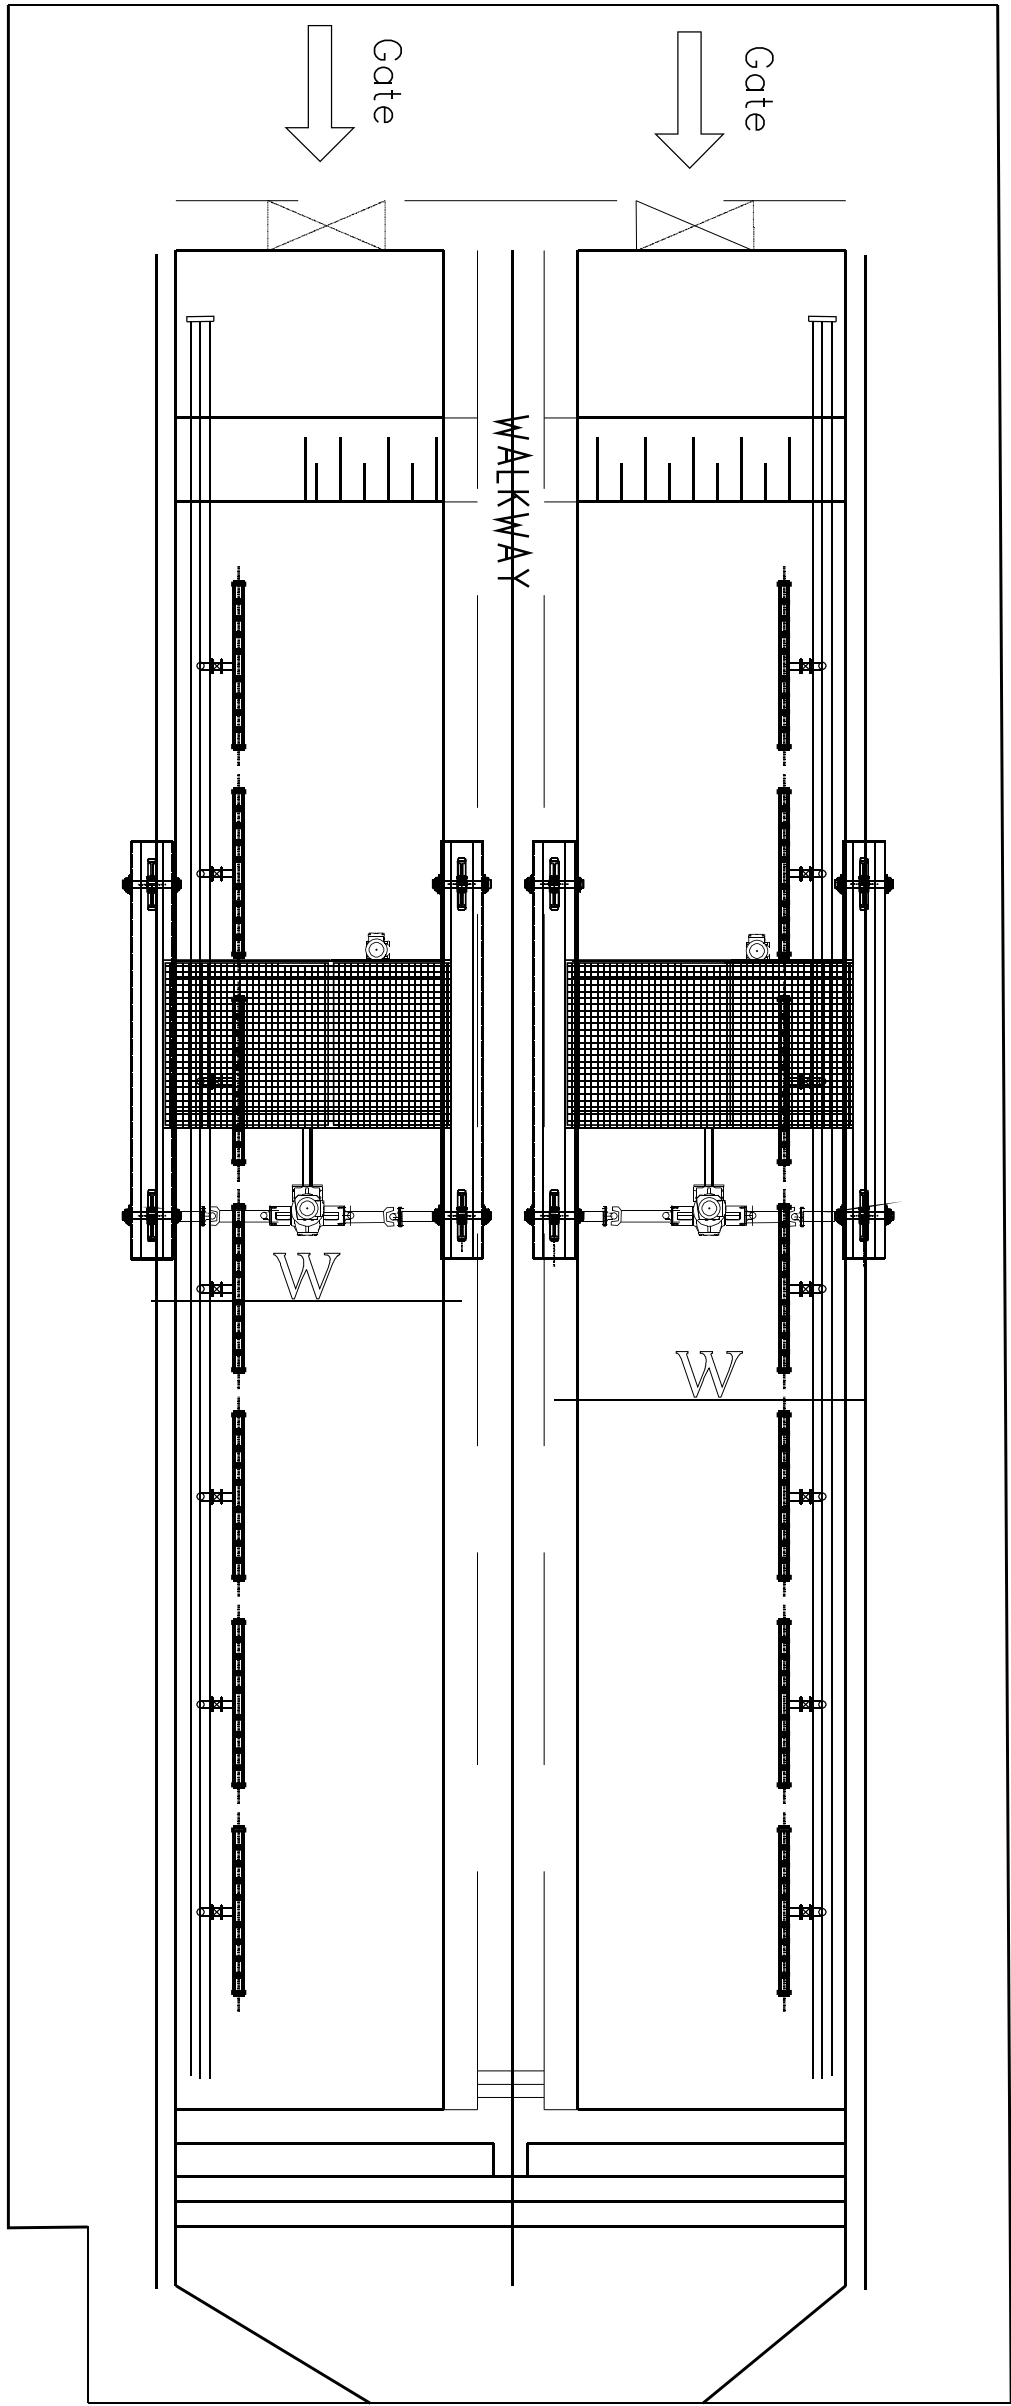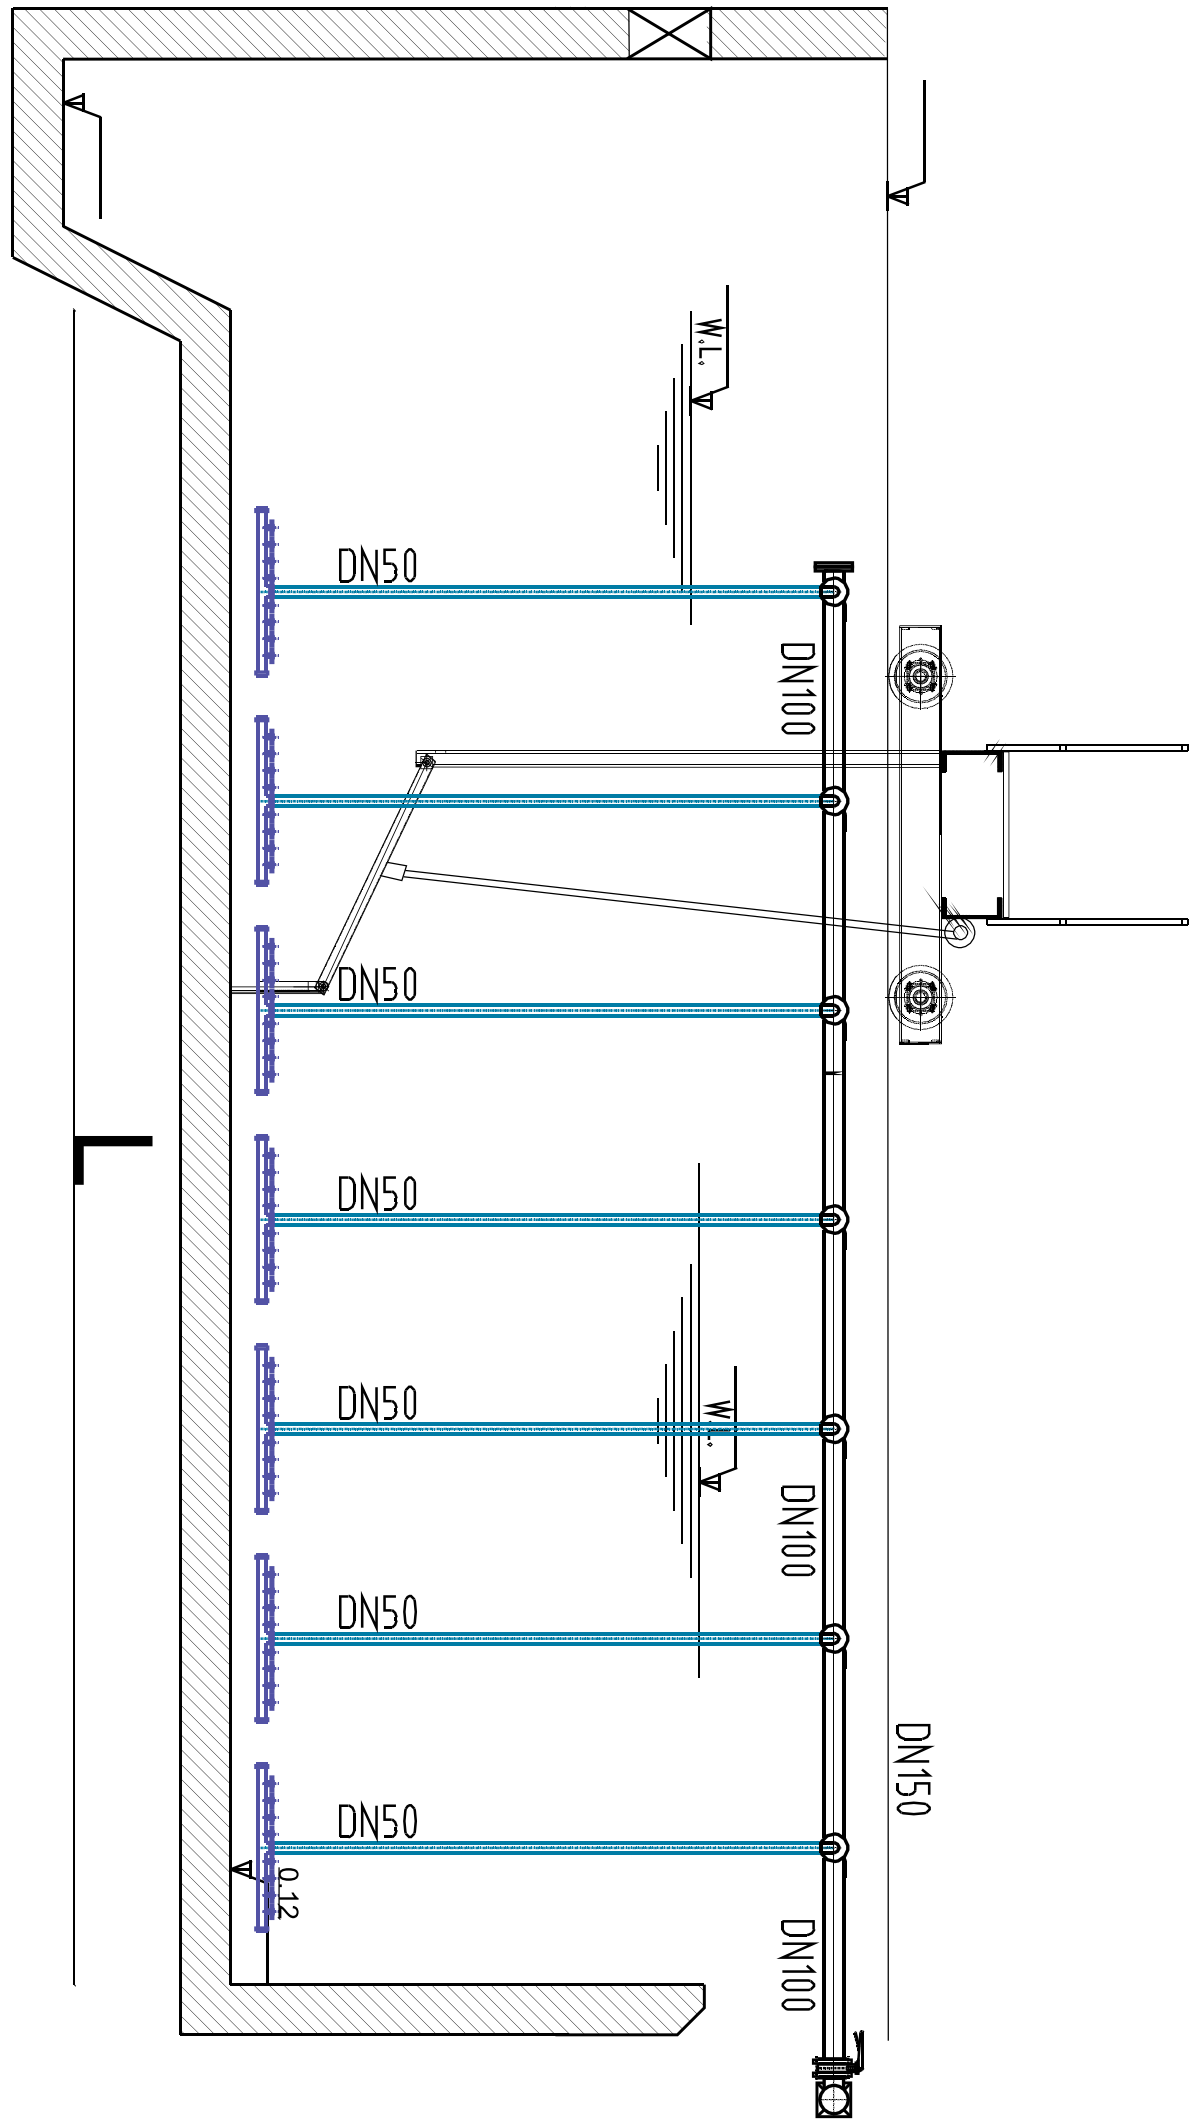

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

DESIGNER/CONTRACTOR:			
Z.C.E			
AYTOKALAN YOLU, AYLA ARSIZLI, CUMH. BULVARI			
celale.agim@yildirim.com			
TITLE			
Oil removal			
SCALE			
BROWN	PREPARED	CHECKED	APPROVED
K.T	A.S	A.S	S.MOHA
DATE			



Z.C.E

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

شركة الزهراء
للمقاولات الهندسية
والتوريدات

4. Sand Silo



Z.C.E

شركة الزهراء
للمقاولات الهندسية
والتوريدات

EIZAHRAA FOR ENGINEERING CONTRACTING AND Supplying

Sec01:



Field	Value
Manufacturer	Factory
Quantity	1

Sec02:

Field	Value
Capacity	5 m3
Inlet	Pipe 150 mm PN10
Outlet	Pipe 150 mm PN10

Sec03:

Field	Value
Shell	Epoxy coated steel 37
Cone	Epoxy coated steel 37
Nozzle	Epoxy coated steel 37

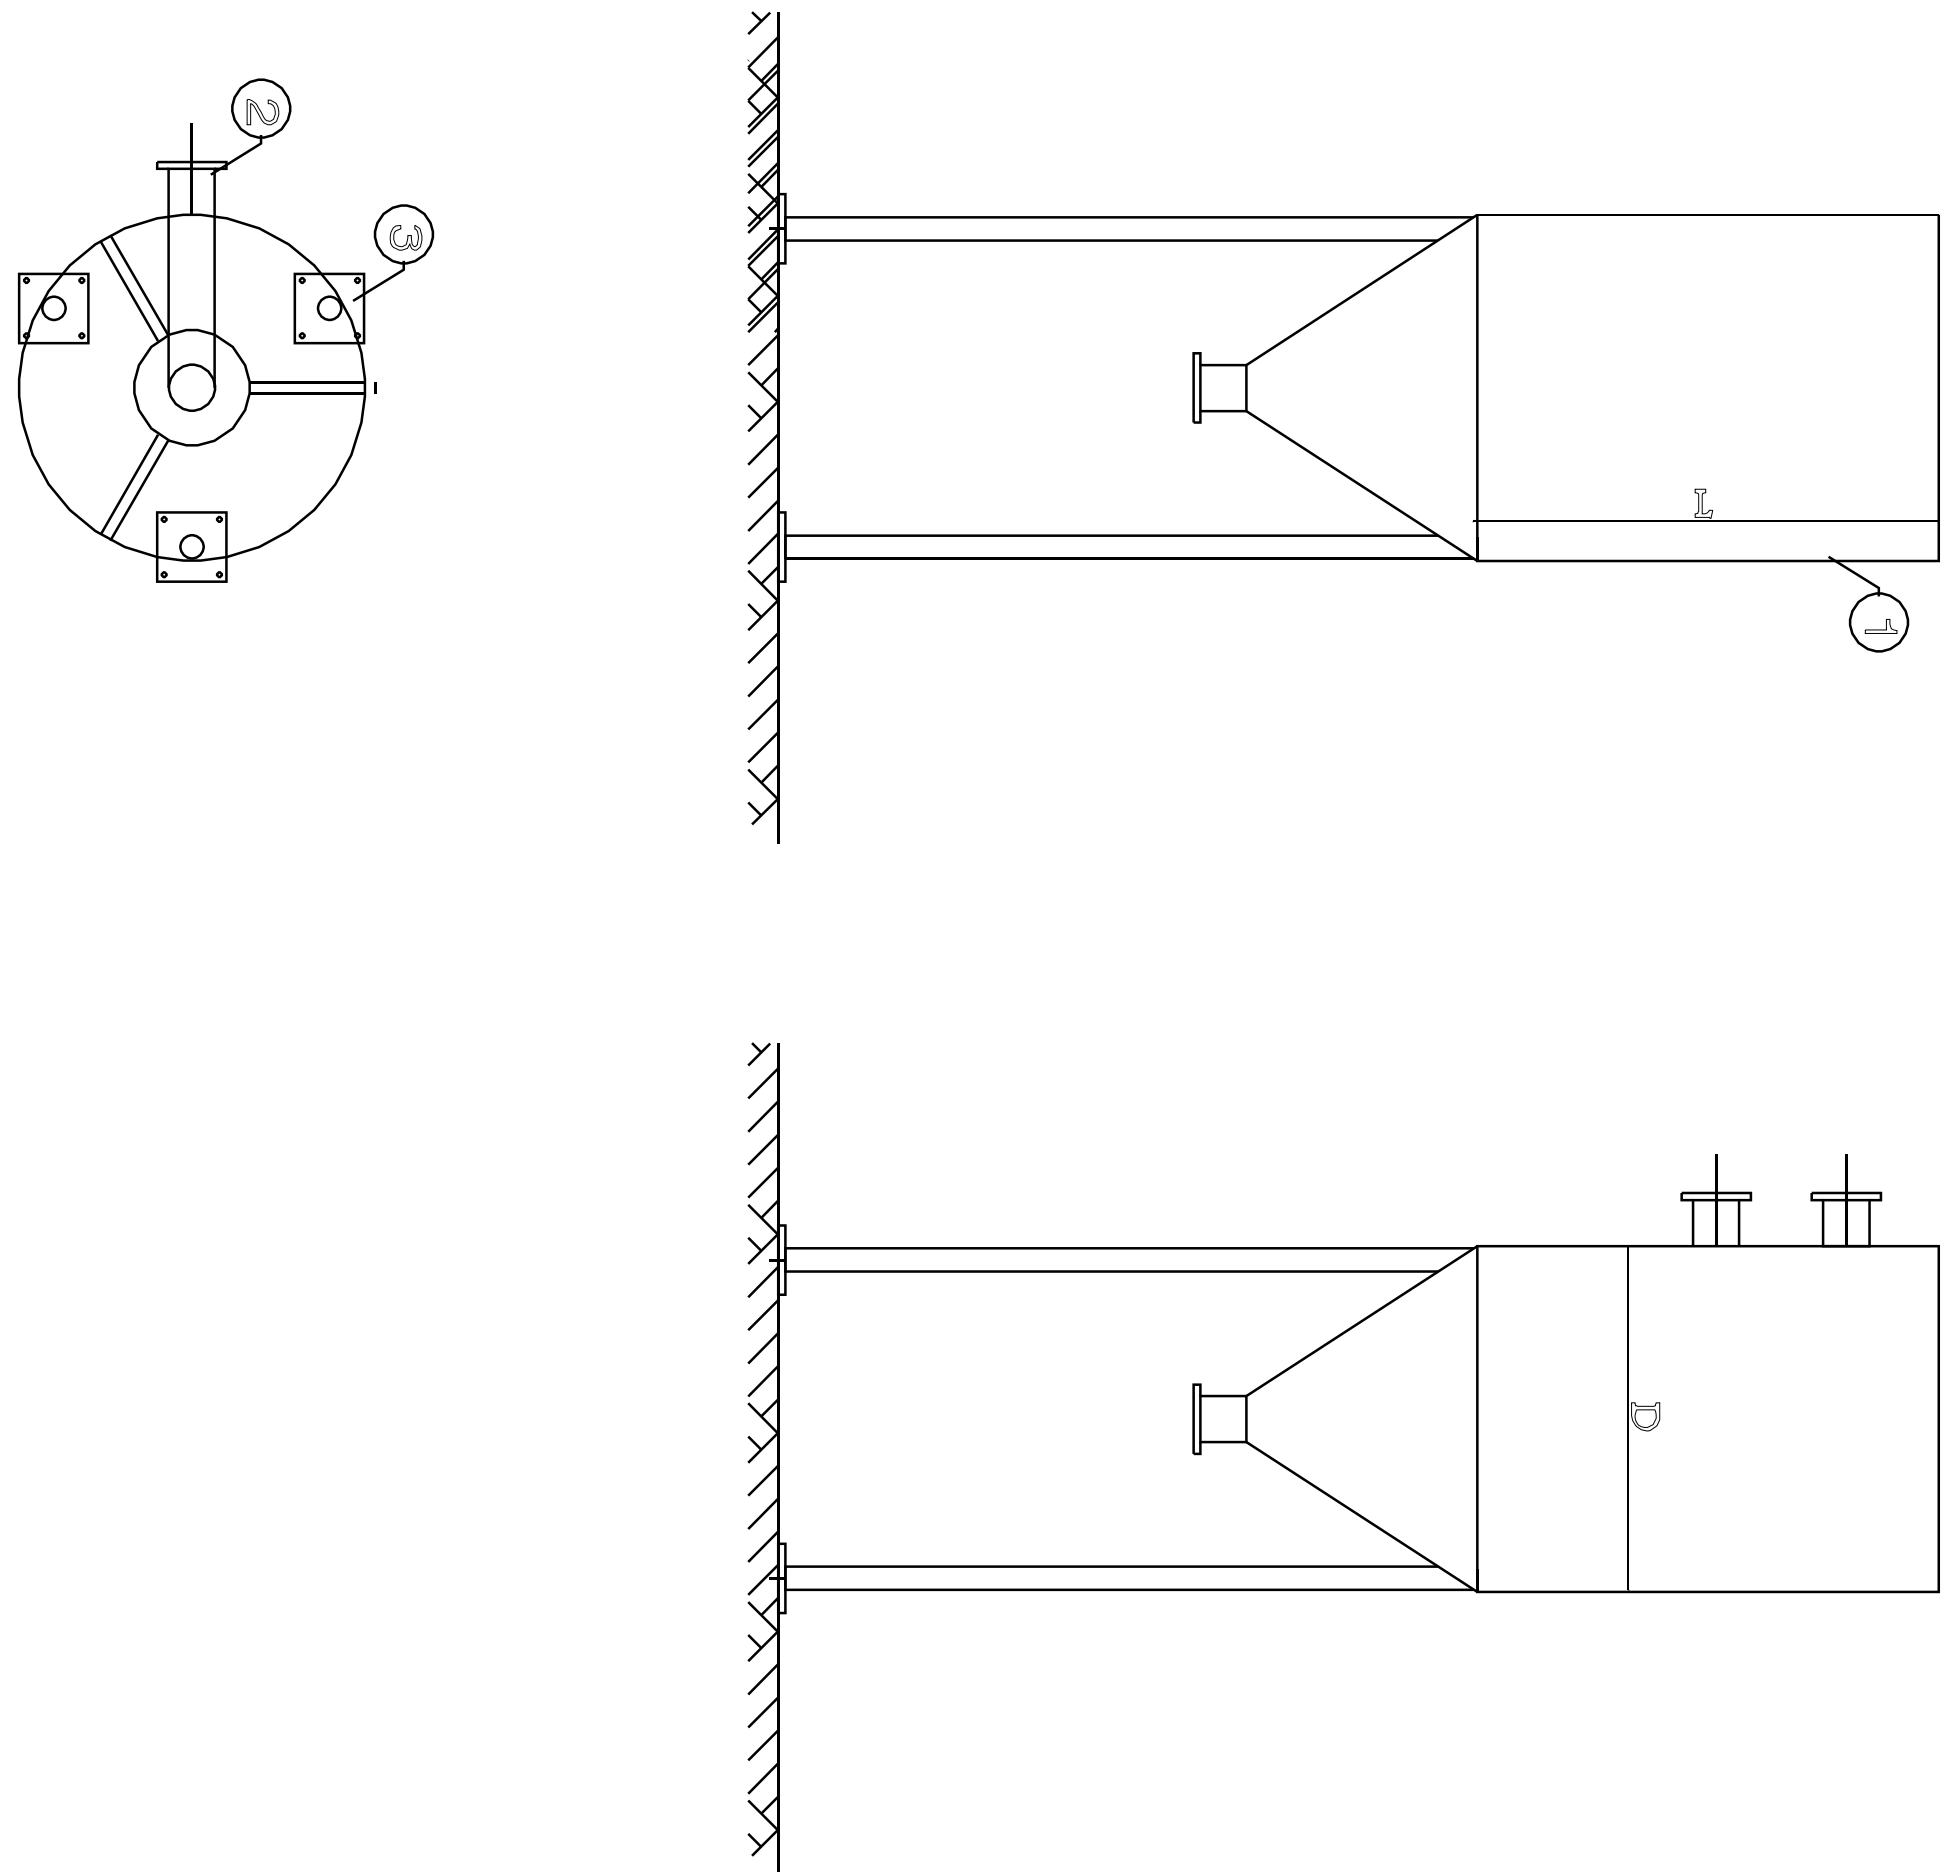

7	Level indicator	ST - 37
6	loader	ST - 37
5	Vent	ST - 37
4	Handrail	ST - 37
3	Leg pipe 3"	ST - 37
2	Inlet pipe 200 mm	ST - 37
1	Cylinder 6 mm	ST - 37
	Decorations	
None		Monobell

[illegible]